


# HNPS Advances in Nuclear Physics

Vol 27 (2019)

HNPS2019

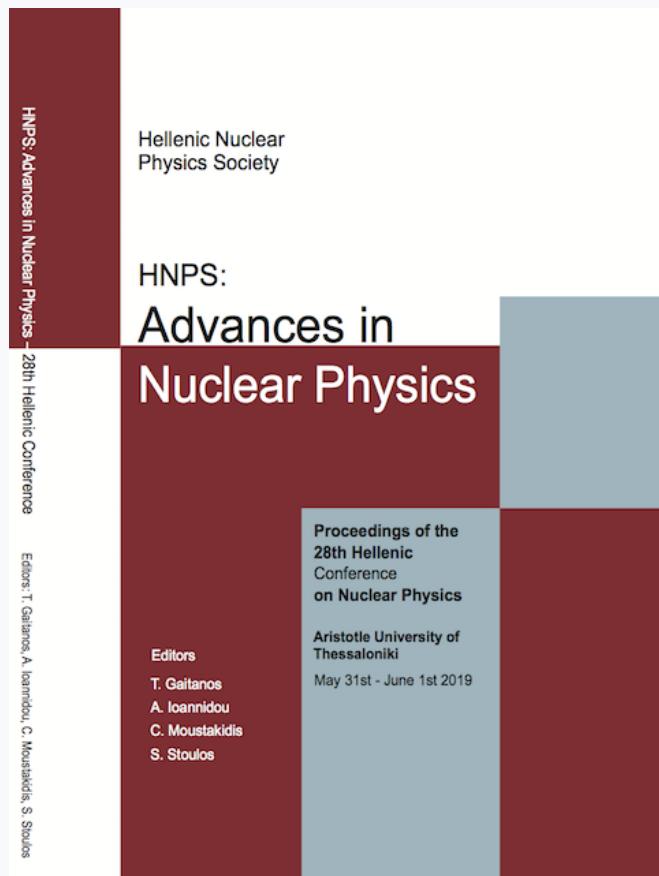

## To cite this article:

Aggregate authors list, (abstract only). (2020). Abstracts only (no papers submitted). *HNPS Advances in Nuclear Physics*, 27, a1-a47. Retrieved from <https://eproceedings.eKT.gr/index.php/hnps/article/view/3018>



## Progress in gaseous detectors

Ioannis Giomataris,  
*IRFU, CEA, Universite Paris-Saclay, F-91191 Gif-sur-Yvette, France*

A brief review on Micromegas detector with current developments and future projects will be presented. The detector is used in several experiments in both particle and nuclear physics. Particular attention will be devoted to the neutron detection and to large volume devices for nuclear astrophysics and nuclear structure experiments. This device is also used for solar axion search at CERN. A new development aiming to reach picoseconds time resolution is under way by an international collaboration. This is a challenge for future ultra-high-luminosity accelerators as well as for particle identification.

A new type of gaseous detector based on a spherical geometry will also be presented. The detector consists of a large spherical gas volume with a central electrode forming a radial electric field. A small spherical sensor located at the center is acting as a proportional amplification structure.

The spherical detector combining sub-keV energy threshold and versatility of the target (Ne, He, H) opens the way to search for ultra-light dark matter WIMPs down to 100 MeV. The next project NEWS-G, under construction, is a large detector that consists in a selected pure copper sphere of 1.4 meter of diameter to be installed at SNOLAB-Canada. This device can detect neutrinos from a nuclear reactor through neutrino-nucleus elastic interaction, neutrinos from supernova explosions and is competitive for double beta decay search using Xe-136 high-pressure gas target.



## A novel Beam Loss Monitor for the ESS Linac, based on a Micromegas neutron detector

Thomas Papaevangelou

*IRFU, CEA, Universite Paris-Saclay, F-91191 Gif-sur-Yvette, France*  
*[The ESS-nBLM team]*

The detection and continuous monitoring of beam losses is crucial for the safe operation for high intensity linear accelerators, such as the ESS Linac, because even the loss of a small fraction of the beam could result in significant irradiation and damage of accelerator equipment. A Beam Loss Monitor (BLM) system must be capable of detecting the smallest possible fraction of beam loss, approaching 0.01 W/m, in order to prevent activation of machine components and allow hands-on maintenance. A common way to monitor losses is by detecting the secondary radiation that follows the impact of the lost particles to the accelerator materials. However, especially at the first stages of the accelerators (proton energies <100 MeV), typical BLMs based on charged particle detection (i.e. Ionization Chambers) are not suitable because the expected particle fields will be dominated by neutrons and photons. Another issue is the photon background induced by the RF cavities, due to field emission from the electrons forms the cavity walls, resulting in bremsstrahlung photons.

The idea for the new BLM system (ESS-nBLM) is to use Micromegas detectors that are designed to be sensitive only to fast neutrons and insensitive to low energy photons (X and gammas) and to thermal neutrons, since they may not be directly correlated to beam losses. The appropriate configuration of the Micromegas operating conditions will allow excellent timing, strong intrinsic suppression of gamma background and possibility to count individual neutrons, extending thus the dynamic range to very low particle fluxes. The concept of the ESS-nBLM system, as well as the performance of detector prototypes from tests in several irradiation facilities, will be presented here.



## The Nuclear Engineering and EMINÉ Master Programme, at KTH Royal Institute of Technology, in Stockholm, Sweden

Elina Charatsidou  
*Students Ambassador of Royal Institute of Technology*

Elina Charatsidou is a graduate from the Physics Department of AUTH. She is currently studying at KTH, Royal Institute of Technology in Stockholm, Sweden. She is enrolled at the Nuclear Energy Engineering Master's Program, and she is the student ambassador at the master's program as well. Through this position at KTH, she is responsible for informing institutions and perspective students worldwide, about studies in Sweden, at KTH, and at the Nuclear Energy Engineering and EMINÉ Master's Programs. During the presentation, information will be given for the application process students should follow, information for dates and deadlines, steps to be taken after they are being accepted at KTH, as well as information about the student life in Stockholm, tuition fees, courses included in the curriculum, and future job perspectives offered in Sweden. Lastly, students will have the opportunity to ask specifically directed questions for any of the aforementioned topics, receiving answers coming from a student with similar educational background, and based on the training she has received as a student ambassador as well as from experience gained throughout this year.



## From Nuclei to Stars with a Relativistic Density Functional

Stefan Typel<sup>1,2</sup>

<sup>1</sup> Technische Universität Darmstadt, Institut für Kernphysik, Schlossgartenstraße 9, 64289 Darmstadt, Germany

<sup>2</sup> GSI Helmholtzzentrum für Schwerionenforschung GmbH, Planckstraße 1, 64291 Darmstadt, Germany

A generalized relativistic density functional (gRDF) with density-dependent meson-nucleon couplings [1-4] is developed for a unified description of nuclei and strongly interacting matter, in particular for astrophysical applications. The parameters of this phenomenological model are obtained from a fit to nuclear binding energies, charge form factor data (charge and diffraction radii, surface thicknesses) and spin-orbit splitting of a set of nuclei. The resulting nuclear matter parameters are very reasonable and the predicted neutron matter equation of state (EoS) is consistent with ab-initio calculations using chiral effective field theory. The nuclear symmetry fulfills current experimental and theoretical constraints.

Light and heavy nuclei are included as explicit degrees of freedom. Their dissolution is described with the help of medium-dependent mass shifts that mainly originate from the action of the Pauli principle. Consistency with the virial EoS at very low densities is achieved by including two-nucleon correlations in the continuum in an effective way [5]. The emission of light nuclei in heavy-ion collisions [6] and  $\alpha$ -particle correlations at the surface of Sn nuclei [7] are studied as examples for experimental tests of the model.

EoS tables for astrophysical simulations [8], e.g., core-collapse supernovae and neutron-star mergers, are generated in a wide range of densities, temperatures and isospin asymmetries. Thermodynamic properties and the chemical composition of compact star matter are extracted. A first-order phase transition at high densities is modeled with a modified excluded-volume mechanism [9]. Finally, some problems [10] are discussed and an outlook is given.

### Acknowledgments

This work is partly supported by “NewCompStar” (COST Action MP 1304 of the EU), the Helmholtz Association (HGF) through the Nuclear Astrophysics Virtual Institute (NAVI, VH-VI-417) and by the Deutsche Forschungsgemeinschaft (DFG, grant no. SFB1245).

### References

- [1] S. Typel *et al.*, Phys. Rev. **C 81**, 015803 (2010)
- [2] S. Typel, arXiv: 1504.01571 (2015)
- [3] H. Pais and S. Typel, Nuovo Cimento **C 39**, 393 (2016)
- [4] S. Typel, J. Phys. G **45**, 114001 (2018)
- [5] M. D. Voskresenskaya and S. Typel, Nucl. Phys. **A 887**, 42(2012)
- [6] M. Hempel *et al.*, Phys. Rev. **C 91**, 045805 (2015)
- [7] S. Typel, Phys. Rev. **C 89**, 064321 (2014)
- [8] M. Oertel *et al.*, Rev. Mod. Phys. **89**, 015007 (2017)
- [9] S. Typel and D. Blaschke, Universe **4**, 32 (2018)
- [10] S. Typel, Particles **1**, 2 (2018)



# First Coherent Elastic $\nu$ -Nucleus Scattering (CEvNS) measurements and the potential new physics involved

Theocharis S. Kosmas

*Department of Physics, University of Ioannina, Greece*

Motivated by the recent observation of coherent elastic neutrino-nucleus scattering (CEvNS) at the COHERENT experiment [1-2], we explore its potential in probing important nuclear structure parameters. By means of a dedicated statistical analysis [3-5], constraints are extracted on the harmonic oscillator size parameter, the neutron radial moments as well as on important parameters entering the definition of the neutron form factors. The attainable sensitivities and the prospects of improvement regarding the next phase of the COHERENT experiment are also considered and analyzed on the basis of two upgrade scenarios [6].

Finally, encouraged by our successful application of the Non-Standard-Interactions (NSIs) and the novel vector  $Z'$  or the scalar  $\phi$  mediators [NSI and  $U'(1)$  scenarios] to the CEvNS event rates measured at Oak Ridge with the COHERENT neutrino experiment, we provide improved interpretation of these data and subsequently we extract sensitive constraints to the standard and non-standard model physics [6].

## References

- [1] D. Akimov et al. (COHERENT), *Science* **357** (2017) 1123.
- [2] D. Akimov et al. (COHERENT), arXiv: [nucl-ex]/1804.09459
- [3] T.S. Kosmas, O.G. Miranda, D.K. Papoulias, M. Tortola, and J.W.F. Valle, *Phys. Rev. D* **92** (2015) 013011.
- [4] T.S. Kosmas, D.K. Papoulias, M. Tortola, and J.W.F. Valle, *Phys. Rev. D* **96** (2017) 063013.
- [5] D.K. Papoulias and T.S. Kosmas, *Phys. Rev. D* **97** (2018) 033003.
- [5] D.K. Papoulias, T.S. Kosmas et al., *Phys. Lett. B*, submitted.



## Proxy-SU(3) predictions

Smaragda Sarantopoulou

*Institute of Nuclear and Particle Physics, National Centre for Scientific Research “Demokritos”, Greece*

Using a new approximate analytic parameter-free proxy-SU(3) scheme, we make simple predictions of shape observables for deformed nuclei, namely  $\gamma$  and  $\beta$  deformation variables, BE(2)s, lifetimes, spectra, the global feature of prolate dominance and the locus of the prolate-oblate shape transition.

### References

- [1] “Proxy-SU(3) symmetry in heavy nuclei: Prolate dominance and prolate-oblate shape transition”, S. Sarantopoulou, D. Bonatsos, I. E. Assimakis, N. Minkov, A. Martinou, R. B. Cakirli, R. F. Casten, and K. Blaum, Bulg. J. Phys. 44 (2017) 417-426.
- [2] “Parameter-independent predictions for nuclear shapes and B(E2) transition rates in the proxy-SU(3) model”, A. Martinou, S. Peroulis, D. Bonatsos, I. E. Assimakis, S. Sarantopoulou, N. Minkov, R. B. Cakirli, R. F. Casten, and K. Blaum, in HNPS: Advances in Nuclear Physics : Proceedings of the 26th Annual Symposium of the Hellenic Nuclear Physics Society, p. 21-26. arXiv: 1712.04134 [nucl-th].



## A mechanism for shape coexistence


Andriana Martinou

*INPP Demokritos, 15310 Aghia Paraskevi, Athens, Greece*

A mechanism for shape coexistence is proposed. The mechanism is activated by large deformation and involves the coupling of the nuclear shells 6-14, 14-28, 28-50, 50-82, 82-126 with the harmonic oscillator shells 2-8, 8-20, 20-40, 40-70, 70-112 respectively. The outcome is, that the phenomenon may occur in certain islands on the nuclear map. The mechanism predicts without any parameters, that nuclei with either proton number ( $Z$ ), whether neutron number ( $N$ ) between 8, 18-20, 34-42, 60-72, 96-116 are candidates for shape coexistence. Predictions for the energy and the shape of the  $0_2^+$  states are made. In the  $N \sim 20$  island of inversion the mechanism predicts, that an inversion of the  $0_1^+$  states occurs at  $N=18$ .

### References

- [1] A. Martinou et al., Proc. of 37-th International Workshop on Nuclear Theory, Nucl. Th., 37, Rila Mountains, Bulgaria (2018)
- [2] A. Martinou et al., Proc. of 27th Ann. Symp. of the H.N.P.S., arXiv: 1810.11860v1, (2018).



# State-of-the-art of neutron activation analysis at Frank Laboratory of Neutron Physics of Joint Institute for Nuclear Research, Dubna, Russia

Marina Frontasyeva

*Sector of Neutron Activation Analysis and Applied Research, Division of Nuclear Physics, Frank Laboratory of Neutron Physics, Joint Institute for Nuclear Research, Dubna, Russian Federation*


The history of the development of neutron activation analysis in the Laboratory of Neutron Physics at Joint Institute for Nuclear Research is briefly outlined. Created under initiative of Academician I.M. Frank in the 1960s, a small group now turned into a large international team involved in projects in the framework of programs coordinated and supported by IAEA, the European Union, the Russian Fund for Basic Research(RFBR), as well as grants of Plenipotentiaries of JINR member states. Modernization of the pneumatic system equipped with three automatic sample changers and created NAA database to automate the measurement and processing of gamma spectra of induced radionuclides are described. Experience in the Life Sciences and Materials Science is summarized. Examples are given of projects related to the monitoring of atmospheric deposition of heavy metals and radionuclides carried out in the framework of the United Nations Program on Long-Range Transboundary Air Pollution in Europe (UNECE ICP Vegetation), a project to assess the state of the environment in Egypt, based on the analysis of soil and the sediment basin of the river Nile, as well as project on monitoring trace elements in aquatic ecosystem in the Western Cape, South Africa («Mussel Watch Program»), etc. In combination with microscopy, the synthesis of nanoparticles of various metals via biotechnology is studied. Our investigations on applying NAA to solve the problem of industrial wastewater treatment were awarded Gold Medals by the European Union, in 2013 and 2015. New areas of research –study of natural medicinal plants and search for cosmic dust in natural planchettes (Arctic and Antarctic mosses, Siberian peat bog cores, etc) –reflect the public and scientific interest in these topics. Future extensions of the sector's research is connected with the radioecological studies using precision gamma-spectrometry and a low-background laboratory for carrying out measurements of natural and anthropogenic radioactivity. Perspective of creating the Centre of Collective Useage at the planned Dubna Neutron Source of the fourth generation (DNS-4) to be put into operation in 2035-2036 is mentioned.

## References

M.V. Frontasyeva. Neutron activation analysis for the Life Sciences. A review. "Physics of Particles and Nuclei", 2011, Vol. 42, No. 2, p. 332-378  
<http://www.springerlink.com/content/f836723234434m27/>

S.S. Pavlov, A.Yu. Dmitriev, M.V. Frontasyeva. Automation system for neutron activation analysis at the reactor IBR-2, Frank Laboratory of Neutron Physics, Joint Institute for Nuclear Research, Dubna, Russia. Journal of Radioanalytical and Nuclear Chemistry, 2016, Vol. 309, No. 1, pp. 27-38.  
<http://link.springer.com/article/10.1007/s10967-016-4864-8>

M.V. Frontasyeva, E. Steinnes and H. Harmens. Monitoring long-term and large-scale deposition of air pollutants based on moss analysis. Chapter in a book "Biomonitoring of Air Pollution Using Mosses and Lichens: Passive and Active Approach – State of the Art and Perspectives", Edts. M. Aničić Urošević, G. Vuković, M. Tomašević, Nova Science Publishers, New- York, USA, 2016.



## Response of Radiation Portal Monitors to gamma radiation and detection capability of Orphan Radioactive Sources in scrap loads

F. Leontaris<sup>1</sup>, S. Xanthos<sup>2</sup>, G.Takoudis<sup>3</sup>, A.Clouvas<sup>1</sup>

<sup>1</sup>*Nuclear Technology Lab., Department of Electrical and Computer Engineering, AUTH, Greece.*

<sup>2</sup>*Department of Automation, Alexander Technological Educational Institute of Thessaloniki, Greece*

<sup>3</sup>*European Commission DG-Energy, B-1040 Brussels/Belgium*

Radiation Portal Monitors (RPM) are commonly used to detect and intercept unauthorized movement of nuclear and other radioactive materials both at borders and within States. Furthermore, portal radiation detectors are commonly used by steel industries in the probing and detection of radioactivity contamination in scrap loads. The detectors typically used in RPM are organic scintillating detectors. In this work two different Radiation Portal Monitors were studied: The first one is located in the “EVZONI” Greek border. This RPM is a double pillar portal monitor with two polystyrene (PS) scintillating detectors per pillar. Spatial and Spectral response measurements were conducted with four radioactive point sources (Cs-137, Co-60, Eu-152 and Ba-133). Through the electronic circuit of the detector an energy region- of interest window can be determined in order to focus on the detection of certain radionuclides. The response was taken for three energy regions (low energy, high energy and total energy response). Simulations of the detector were carried out using the MCNP code. The measured spatial response of the plastic detector depends both on the energy window used and on the radioactive source itself. MCNP simulations can describe sufficiently the total energy response characteristics, while in the other two cases are qualitative and quantitative discrepancies, which can be explained due to the light transfer mechanisms (attenuation) within the scintillation volume. Light transfer mechanisms are only modeled in optical simulation tools (e.g. GATE) and not in gamma ray particle simulation tools (MCNP). Minimum Alarm Activities for unshielded Cs-137 and Eu-152 point sources were estimated to 5.2  $\mu\text{Ci}$  Cs-137 and 3  $\mu\text{Ci}$  Eu-152. The second Radiation Portal Monitor is a portal monitor with two PVT scintillating detectors per portal. This RPM is located inside a steel factory in order to detect radioactivity contamination in scrap loads. The RPM was opened, and all principal materials were simulated. Simulations were validated by comparison with corresponding measurements. An experiment with a uniform cargo along with two sets of experiments with different scrap loads and radioactive sources (Cs-137 and Eu-152) were performed and simulated. Simulated and measured results suggested that the nature of scrap is crucial when simulating load-detector experiments. The simulated results were in very good agreement in the case of the uniform cargo. For scrap loads, simulated densities 1.3 and 1.4  $\text{g cm}^{-3}$  produce results that are close to the measured ones. Using Monte Carlo simulations, a series of runs were performed in order to estimate the Minimum Alarm Activities “MAA” for Cs-137, Co-60 and Ir-192 sources for various simulated scrap densities. The highest MAA values for the highest average scrap density tested ( $\rho = 1.3 \text{ g} \cdot \text{cm}^{-3}$ ) were 5 mCi for Cs-137, 0.2 mCi for Co-60 and 18 mCi for Ir-192. Finally Monte Carlo simulations were performed for the determination of the distance needed from an unshielded and lead shielded Cs-137 radioactive source in order to detect the source. The results were compared with analytic calculations and with the results obtained from web (on line dose rate calculators).

### Acknowledgments

Part of this work was performed in the framework of the Interreg -IPA CBC “STRASS” project



## Electret Ion Chambers for Environmental Gamma Monitoring

F. Leontaris<sup>1</sup>, A. Boziari<sup>2</sup>, A. Clouvas<sup>1</sup>, M. Kolovou<sup>2</sup>

<sup>1</sup>*Nuclear Technology Lab., Department of Electrical and Computer Engineering, AUTH, Greece.*

<sup>2</sup>*Greek Atomic Energy Commission, GR-15310 Agia Paraskevi, Greece*

Electret ion chambers (EIC) are inexpensive, light-weight, commercially available, passive charge-integrating devices for accurate measurement of different radiations. EIC are mainly used for short- or long-term radon measurements. However, with small modifications EIC can be used for other type of radiations. Particularly, electret ion chambers become gamma monitors when sealed in a radon leak tight enclosure. The use of EIC as gamma monitors is not relative common (in comparison to TLDs which are used in the majority environmental gamma monitoring). The main scope of this work is to investigate the capabilities of electret ion chambers to measure ambient gamma dose equivalent  $H^*(10)$  or ambient gamma dose equivalent rate. The ambient equivalent dose  $H^*(10)$  is a measurable equivalent of the effective dose, which quantifies the risk to human health associated to radiation exposure. This quantity was introduced by the International Commission on Radiation Units and Measurements (ICRU) back in 1985 and its use is also strongly recommended by ICRP, IAEA and other organizations and metrological institutes such as NIST, NPL. The capabilities of electret ion chambers to measure mean ambient dose equivalent rates were investigated by performing both laboratory and field studies of their properties. First, electret ion chambers were “calibrated” to measure ambient gamma dose equivalent in the Ionizing Radiation Calibration Laboratory (IRCL) of the Greek Atomic Energy Commission. The electret ion chambers were irradiated with different gamma photon energies and different angles. Calibration factors were deduced (electret's voltage drop due to irradiation in terms of ambient dose equivalent). Based on these calibration factors, the mean ambient gamma dose equivalent rate was measured with electret ion chambers (for three times five months period) at eight locations belonging to the Greek early system network (which is based on Reuter-Stokes ionization chambers). In the same locations, in-situ gamma spectrometry measurements were performed with portable germanium detectors and the gamma ambient dose equivalent rates were deduced. The mean ambient dose equivalent rate measured with the passive dosimeters in the different locations was compared with those measured by the portable germanium detectors and Reuter-Stokes ionization chambers. The influence of cosmic radiation and the intrinsic voltage loss when performing long-term environmental gamma measurements with electret ion chambers was estimated.

### Acknowledgments

This work was performed in the framework of the 16ENV04 Preparedness project of the European Metrology Programme for Innovation and Research (EMPIR). The EMPIR initiative is co-funded by the European Union's Horizon 2020 research and innovation programme and the EMPIR Participating States



# The APAPES project at the tandem accelerator facility of "Demokritos": A progress report

E.P. Benis<sup>1</sup>, I. Madesis<sup>2,3</sup>, A. Laoutaris<sup>2,3</sup>, S. Nanos<sup>1,3</sup> and T.J.M. Zouros<sup>1,2</sup>

<sup>1</sup>*Department of Physics, University of Ioannina, GR 45110 Ioannina, Greece*

<sup>2</sup>*Department of Physics, University of Crete, Voutes campus, GR 71003 Heraklion, Greece*

<sup>3</sup>*Tandem Accelerator Laboratory, INPP, NCSR Demokritos, GR 15310 Ag. Paraskevi, Greece*

The APAPES project (atomic physics with accelerators: projectile electron spectroscopy) has established in Greece the discipline of Atomic Physics with accelerators. The experimental setup is currently fully operational at the tandem accelerator facility of "Demokritos" [1]. The APAPES research interests are primarily focused on collision dynamics investigations by exploiting the possibilities offered by the metastable He-like ( $1s2s\ 1,3S$ ) ion beams at collision energies of few MeV/u [2]. He-like beams are routinely delivered by tandem accelerators in a ( $1s2\ 1S$ ,  $1s2s\ 1,3S$ ) mixed-state content. However, our group has developed a technique that allows for determining the ion beam content and, in cases, even separating the contributions of the ground,  $1s2\ 1S$ , and metastable,  $1s2s\ 1,3S$ , ion beam states, to the Auger projectile electron spectra [3,4]. Based on this, we have initiated a systematic isoelectronic investigation on: (a) the production of Li-like  $1s2s(3S)nl\ 2,4L$  states by direct  $nl$  transfer and transfer-excitation processes. These studies, among others, shed light onto the long-standing controversy about the population enhancement of the  $1s2s2p\ 4P$  state from higher lying quartet states through the selective cascade feeding mechanism [5,7]. (b) The production of  $2s2p\ 1,3P$  hollow states by excitation, double excitation and transfer loss processes. Our experimental data are in accordance with state-of-the-art theoretical three-electron atomic orbital coupled channel calculations using the semi-classical close-coupling approach [8]. Here, experimental results to date will be reported, while the overall progress of the APAPES project and near future plans will be reviewed.

## Acknowledgments

We acknowledge support of this work by the project "Cluster of Accelerator Laboratories for Ion-Beam Research and Applications - CALIBRA" (MIS 5002799) which is implemented under the Action "Reinforcement of the Research and Innovation Infrastructure", funded by the Operational Programme "Competitiveness, Entrepreneurship and Innovation" (NSRF 2014-2020) and co-financed by Greece and the European Union (European Regional Development Fund).

## References

- [1] I. Madesis *et al.*, J. Phys: Conf. Ser. **583** 012014 (2015)
- [2] E.P. Benis, I. Madesis, A. Laoutaris, S. Nanos and T.J.M. Zouros, Atoms **6**, 66 (2018)
- [3] E.P. Benis and T.J.M. Zouros, J. Phys. B **49**, 235202 (2016)
- [4] E.P. Benis *et al.*, J. Electr. Spectr. Rel. Phenom. **222**, 31 (2018)
- [5] D. Strohschein *et al.*, Phys. Rev. A **77**, 022706, (2008)
- [6] T.J.M. Zouros, B. Sulik, L. Gulyas, K. Tokesi, Phys. Rev. A **77**, 050701 (2008)
- [7] D. Röhrbein, T. Kirchner, S. Fritzsche, Phys. Rev. A **81**, 042701 (2010)
- [8] J.W. Gao, Y. Wu, N. Sisourat, J.G. Wang and A. Dubois, Phys. Rev. A **96** 052703 (2017)



## Production of hollow 2s2p 3,1P states in collisions of C4+ (1s2 1S, 1s2s 1,3S) ions with gas targets

A.Laoutaris<sup>1,2</sup>, I. Madesis<sup>1,2</sup>, S. Nanos<sup>2,3</sup>, E. P. Benis<sup>3</sup>, A. Dubois<sup>4</sup> and T.J.M Zouros <sup>1,2</sup>

<sup>1</sup> Department of Physics, University of Crete, Voutes campus, GR 71003 Heraklion, Greece

<sup>2</sup> Tandem Accelerator Laboratory, INPP, NCSR Demokritos, GR 15310 Ag. Paraskevi, Greece

<sup>3</sup> Department of Physics, University of Ioannina, GR 45110 Ioannina, Greece

<sup>4</sup> Sorbonne Université, CNRS, Laboratoire de Chimie Physique Matière et Rayonnement, Paris, France


The production of the doubly-excited 2s2p 3,1P hollow states in collisions of fast (few MeV/u) He-like C4+ (1s2, 1s2s) mixed-state ion beams with gas targets is reported. He-like beams are routinely delivered by tandem accelerators in a (1s2 1S, 1s2s 1,3S) mixed-state, the content of which depends on the type of ion-stripper (gas or foil), as well as the stripping energy [1]. Based on metastable fraction-controlled measurements of the Auger decay spectra of the 2s2p 3,1P states [2] and a technique developed by our group that allows for determining the ion beam content [3,4], we have initiated a systematic isoelectronic investigation on the processes contributing to the production of the doubly excited 2s2p 3,1P hollow states. These include the first order process of direct electron excitation, the second order processes of double electron excitation and the process of electron transfer-loss. So far, we have performed experiments for collision energies between 0.5 and 1.5 MeV/u C4+ with H<sub>2</sub>, He, Ne and Ar gas targets. Our experimental results are accompanied, for the case of He gas targets, with state-of-the-art theoretical three-electron atomic orbital coupled channel calculations using the semi-classical close-coupling approach [5]. Calculations are seen to overall reproduce the experimental data after accounting for the ion beam metastable content, and thus, provide valuable quantitative information about the processes involved.

### Acknowledgments

We acknowledge support of this work by the project “Cluster of Accelerator Laboratories for Ion-Beam Research and Applications - CALIBRA” (MIS 5002799) which is implemented under the Action “Reinforcement of the Research and Innovation Infrastructure”, funded by the Operational Programme “Competitiveness, Entrepreneurship and Innovation” (NSRF 2014-2020) and co-financed by Greece and the European Union (European Regional Development Fund).

### References

- [1] A. Laoutaris, Master thesis, unpublished (2016)
- [2] E.P. Benis, I. Madesis, A. Laoutaris, S. Nanos and T.J.M. Zouros, Atoms **6**, 66 (2018)
- [3] E.P. Benis and T.J.M. Zouros, J. Phys. B **49**, 235202 (2016)
- [4] E.P. Benis *et al.*, J. Electr. Spectr. Rel. Phenom. **222**, 31 (2018)
- [5] J.W. Gao, Y. Wu, N. Sisourat, J.G. Wang and A. Dubois, Phys. Rev. A **96** 052703 (2017)



## Mass measurements of neutron-deficient lanthanides around the neutron shell closure N=82

M. Lykiardopoulou<sup>1,2</sup>, C. Andreoiu<sup>4</sup>, S. Beck<sup>7</sup>, T. Brunner<sup>2,3</sup>, T. Dickel<sup>9</sup>, I. Dillmann<sup>2</sup>, E. Dunling<sup>2</sup>, J. Flowerdew<sup>6</sup>, L. Graham<sup>2</sup>, G. Gwinner<sup>5</sup>, A. Jacobs<sup>1,2</sup>, R. Klawitter<sup>2</sup>, B. Kootte<sup>2,5</sup>, Y. Lan<sup>1,2</sup>, E. Leistenschneider<sup>1,2</sup>, V. Monier<sup>2</sup>, I. Mukul<sup>2</sup>, S.F. Paul<sup>2</sup>, W. Plass<sup>8</sup>, M.P. Reiter<sup>2</sup>, C. Scheidenberger<sup>8</sup>, R. Thompson<sup>6</sup>, J.L. Tracy<sup>2</sup>, M. Vansteenkiste<sup>2</sup>, M. Weiser<sup>6</sup>, C. Will<sup>8</sup>, J. Dilling<sup>2</sup>, A.A. Kwiatkowski<sup>2</sup>,

<sup>1</sup> University of British Columbia, Vancouver, BC, Canada

<sup>2</sup> TRIUMF, Vancouver, BC, Canada

<sup>3</sup> McGill University, Montreal, QC, Canada

<sup>4</sup> Simon Fraser University, Vancouver, BC, Canada

<sup>5</sup> University of Manitoba, Winnipeg, MB, Canada

<sup>6</sup> University of Calgary, Calgary, AB, Canada

<sup>7</sup> JLU Giessen, Giessen, Germany

<sup>8</sup> II. Physikalisches Institut, Justus-Liebig-Universität, Giessen, Germany

<sup>9</sup> GSI Helmholtz Center for Heavy Ion Research, Darmstadt, Germany

Neutron-deficient lanthanides are a subject of interest from many perspectives. Not only can they provide information about the neutron shell closure at N=82, but they can also indicate where the proton drip-line lies in this region. In addition, since some lanthanides are anchors of alpha decay chains, they can give valuable information about the progenitors and intermediate nuclei. To this end, the masses of neutron-deficient lanthanides, approaching the atomic number 150, were measured at TRIUMF's Ion Trap for Atomic and Nuclear science (TITAN). TITAN specializes in high-precision mass measurements and in-trap decay spectroscopy, which recently was equipped with a Multi-Reflection Time of Flight mass spectrometer (TITAN MR-ToF) that can be used either as an isobaric separator or a mass spectrometer. For this experiment, radioactive ion beam from the TRIUMF's Isotope Separator and Accelerator (ISAC) was used to trap and measure neutron-deficient lanthanides in TITAN's Multi-Reflection Time of Flight mass spectrometer. Mass-selective re-trapping was used for the first time with radioactive beam and resulted in suppression of the background by four orders of magnitude. This allowed the measurement of the masses of neutron-deficient lanthanides, Yb and Tm. Not only were many uncertainties reduced but also some measured for the first time. Preliminary results on the impact of these mass measurements to the evolution of the neutron shell closure at N=82 will be presented.



## Neutrons capture cross-sections for $^{74}\text{Se}$ in the keV energy region using activation methods at a medical linear accelerator facility.

E.Vagena<sup>1&2</sup>, L.Packer<sup>2</sup> and S.Stoulos<sup>1</sup>

<sup>1</sup>Nuclear Physics Lab., School of Physics, Aristotle University of Thessaloniki, Thessaloniki, Greece

<sup>2</sup>CCFE, Culham Science Centre, Abingdon, Oxon OX14 3DB, United Kingdom

Neutron capture reactions play an important role in the galactic chemical evolution since they are responsible for the synthesis of the nuclei heavier than iron. The  $(n, \gamma)$  cross section of selenium isotope  $^{74}\text{Se}$  from 10 keV to 1 MeV was experimentally determined via activation methods using a bremsstrahlung photon beam delivered by an electron medical accelerator. The generation of  $^{75}\text{Se}$  nuclei proceeds via both neutron capture and photonuclear reactions at a medical linear accelerator environment, and the respective photon and neutron emission contribution has been calculated. The theoretical estimation of both the photonuclear and the neutron-capture cross-section of the  $^{74}\text{Se}$  were performed using the TALYS 1.8 code, whilst the weighted neutron capture cross-section was calculated using the FISPACT-II code with a reference neutron spectrum. The results prove that the methodology applied in this work is useful to carry out similar nuclear astrophysics studies at medical centers in the future.

### Acknowledgments

This work is based upon work from the “ChETEC” COST Action (CA16117), supported by COST (European Cooperation in Science and Technology)”



## Radiological Study of Anavalos Submarine Groundwater Discharge at Kiveri, Greece

G. Eleftheriou<sup>1</sup>, F.K. Pappa<sup>1</sup>, N. Maragos<sup>1</sup>, C. Tsabarlis<sup>1</sup>

<sup>1</sup> *Institute of Oceanography, Hellenic Centre for Marine Research, 19013, Anavyssos, Greece*

Submarine groundwater discharges are known to be a significant source of chemical substances, nutrients and pollutants in the coastal zone [1], while in some cases the amount of water from submarine sources are much greater than the terrestrial discharges [2]. In addition, significant amounts of radionuclides are also discharged since groundwater is particularly enriched in natural radionuclides, mainly due to weathering from the subsoil. For this reason a number of natural radionuclides have been extensively used as radio-tracers of hydrological processes [3]. As a result the radiological study of submarine springs is significant for the qualitative characterization of the water as well as for the estimation of key parameters like water age, groundwater and seawater mixing, groundwater coastal residence time, discharge rate and flux.

In this work, a preliminary study of Anavalos submarine springs at Kiveri by a variety of radiometric measurements is presented. The main geomorphological features, the catchment area hydrology and the origin of the groundwater outflows are discussed reviling the significance of the study area as a test site of radio-tracers application. Lab-based and in situ measurements were performed for the determination of the main radionuclides found in the groundwater, including radium isotopes pre-concentration and direct measurement of water samples with an HPGe detector as well as underwater gamma ray spectrometry. Finally, regarding water quality the main heavy metal concentrations and basic physical properties are also presented.

### Acknowledgments

This work is supported by the national program “ΕΠ ΑΝΑΔ-ΕΔΒΜ” in the frame of the ANAVALOS project (MIS 5005218) entitled “Development of an in-situ method for the study of submarine groundwater discharges at the coastal zone using radio-tracers”.

### References

- [1] W.S. Moore, Mar. Chem **65**, 111 (1999)
- [2] C. Tsabarlis *et al.*, J. Environ Radioact **121**, 44 (2012)
- [3] W.C. Burnett *et al.*, Sci. Total Environ **367**, 498 (2006)



## First results of the Performance of the DIAPHANE Detector in Apollonia's Tumulus

Ilia Kalaitzidou<sup>1</sup>, Charikleia Petridou<sup>2</sup>, Dimitrios Sampsonidis<sup>3</sup>

<sup>2</sup> Professor in Aristotle University of Thessaloniki, chariclia.petridou@cern.ch

<sup>3</sup> Associate Professor in Aristotle University of Thessaloniki, sampson@physics.auth.gr

The DIAPHANE detector is a plastic scintillator comprised of three detecting planes, which was established next to Apollonia's tumulus in the frame of the ARCHé project (a collaboration of three French universities with the Aristotle University of Thessaloniki), during the summer of 2018. The objective of this project was the investigation of the effectiveness of muon tomography and of this specific detector on a small scale geological structure. For this purpose, open sky data obtained by the DIAPHANE detector oriented vertically for a total operating time of 21.5 hours was processed and analyzed. First results of the performance of the detector and the cosmic muons angular distribution are presented.



## Studying nanoscale Li diffusion in rutile TiO<sub>2</sub> using the $\beta$ - and $\alpha$ -decay of <sup>8</sup>Li with $\beta$ -NMR and $\alpha$ -radiotracer techniques


*A. Chatzichristos, R.M.L. McFadden, M.H. Dehn, S.R. Dunsiger, D. Fujimoto, V.L. Karner, I. McKenzie, G.D. Morris, M.R. Pearson, M. Stachura, J. Sugiyama, J.O. Ticknor, W.A. MacFarlane, R.F. Kiefl*

*University of British Columbia - Department of Physics and Astronomy*

The diffusion of Li<sup>+</sup> in rutile TiO<sub>2</sub> has been studied extensively with a plethora of experimental and computational methods, as Li<sup>+</sup> is known to move very fast through the c-axis channels, making it a prime candidate for a Li-ion battery anode material. Nonetheless, there are still many puzzling aspects of rutile lithiation, such as why the Li<sup>+</sup> uptake is so limited, as well as why there is such disagreement between the diffusion rates found with different techniques or between the theoretically and experimentally found diffusion barrier. To elucidate the properties of the Li motion in rutile we applied the  $\beta$ -NMR technique, which uses the asymmetry of the  $\beta$ -emissions from a spin-polarized beam of <sup>8</sup>Li to detect the fluctuation of the electric field gradient (EFG) felt by <sup>8</sup>Li due to its diffusing motion. Above 200 K, we found an Arrhenius relationship of the fluctuation rate with temperature, with activation energy in agreement with other studies, but with a corresponding diffusion rate significantly faster than other reported values. In addition, below 100 K a second Arrhenius-like component was revealed, which was attributed to the formation of Li-polaron complexes at that temperature range. This second component was thought to be non-diffusing.

Nonetheless,  $\beta$ -NMR infers indirectly the diffusion rate, based on the fluctuation rate of the EFG due to the <sup>8</sup>Li<sup>+</sup> motion, with the assumption that all fluctuations correspond to Li hopping. A direct technique applicable to the nanoscale could give further insights into the Li motion in rutile. To that end, we developed and employed the <sup>8</sup>Li  $\alpha$ -radiotracer technique, which makes use of the rapid attenuation of the subsequent  $\alpha$ -particles from the decay of <sup>8</sup>Li inside the sample.

We implanted a pulsed beam of <sup>8</sup>Li<sup>+</sup> within 120 nm of the surface of a c-axis oriented single-crystal rutile TiO<sub>2</sub>. We placed the  $\alpha$ -detector at a grazing angle from the surface and thus the rapid attenuation of  $\alpha$  provided a sensitive monitor of the distance from the surface. Our main findings were that Li<sup>+</sup> traps (with a probability > 50 %) at the sample surface, which explains the suppressed Li intercalation in rutile. In addition, we found that the temperature dependence of Li diffusivity is described by a bi-Arrhenius expression, with a diffusion barrier in agreement with other studies above 200 K, but with a second, previously unknown component at lower temperatures, with activation energy in agreement with DFT calculations and our  $\beta$ -NMR measurements. Thus, we established that (at least part of) the second Arrhenius component revealed with  $\beta$ -NMR at low-T is related to actual diffusion. As it is possible to perform both  $\beta$ -NMR and  $\alpha$ -radiotracer measurements at the same time, using the same radioactive <sup>8</sup>Li<sup>+</sup> beam, we believe that the coupling of the two techniques can become a valuable tool in the study of Li diffusion in the nanoscale.



## Dental restoration materials as personal accidental dosimeters

Ioanna K. Sfampa<sup>1</sup>, Lamprini Malletzidou<sup>2</sup>, Panagiotis Pandoleon<sup>3</sup>, George Kitis<sup>1</sup>

<sup>1</sup> *Nuclear and Elementary Physics Laboratory, School of Physics, Faculty of Sciences, AUTH, Greece*

<sup>2</sup> *Department of Solid State Physics, School of Physics, Faculty of Sciences, AUTH, Greece*

<sup>3</sup> *Faculty of Dentistry, Department of Prosthodontics, School of Health Sciences, AUTH, Greece*


Radiation accidents led to the birth of an area in physics, accidental dosimetry. Thermoluminescence (TL) is a basic application tool in radiation dosimetry. Its main application is on the determination of absorbed dose due to radiation events, over and above the normal background radiation. Several materials have been studied as potential accidental dosimeters [1]. The attention is focused on materials which can be found in the anthropogenic environment, but also on materials that are probable to be found on a person, or even assembled in a person, like biomaterials which are widely used in surgical and dentistry applications [2]. Feldspathic porcelain (FP) has been widely used in dentistry and is the most applied material as veneer layer in metal-ceramic restorations. The present work is aiming to prove this material as an accidental personal dosimeter. For this purpose, freshly prepared and *in-vitro* aged samples were examined, and the measurements were also applied in *in-vivo* aged samples which were collected from patients. The majority of relevant scientific works are referred only to laboratory prepared samples [3]. It is a unique experiment that aims to study both *in-vitro* and *in-vivo* aged samples and their dosimetric properties. Additionally, characterization analysis (FTIR, XRD, SEM-EDS) was applied to every step of the aging, in order to examine if TL can be established as a characterization method of the aging progress of FP.

### Acknowledgments

This project is implemented through the Operational Program "Human Resources Development, Education and Lifelong Learning" and is co-financed by the European Union (European Social Fund) and Greek national funds (MIS Code: 5004727).

### References

- [1] I.K. Bailiff, S. Sholom, S.W.S. McKeever, *Radiat. Meas.* 94 (2016) 83–139.
- [2] G.S. Polymeris, V. Giannoulatou, A. Kyriakidou, I.K. Sfampa, G. Theodorou, E. Şahiner, N. Meriç, G. Kitis, K.M. Paraskevopoulos, *Mater. Sci. Eng. C* 70 (2017) 673–680.
- [3] I. Veronese, A. Galli, M.C. Cantone, M. Martini, F. Vernizzi, G. Guzzi, *Radiat. Meas.* 45 (2010) 35–41.



## On the possibility of dating calcium sulphate samples: Luminescence and dose rate measurements

Lamprini Malletzidou<sup>1</sup>, George S. Polymeris<sup>2</sup>, Ioanna K. Sfampa<sup>1</sup>, Konstantinos M. Paraskevopoulos<sup>1</sup>, George Kitis<sup>1</sup>

<sup>1</sup> School of Physics, Aristotle University of Thessaloniki, GR-54124, Thessaloniki, Greece

<sup>2</sup> Institute of Nuclear Sciences, Ankara University, TR-06100 Beşevler, Ankara, Turkey

Calcium sulfates (dehydrate, hemihydrate and anhydrous  $\text{CaSO}_4$ ) have been widely used as a main component of artifacts, including paintings and sculptures. In direct dating, Luminescence techniques are widely used because of their absolute results. Preliminary Thermoluminescence (TL) measurements on commercial gypsum [1] and both commercial and mineral calcium sulfates [2] indicated the presence of stable TL peaks along the dehydrate and hemihydrate samples, despite their water content.

In the framework of this study, the three aforementioned groups of calcium sulfates are being investigated regarding their luminescence properties, including their TL, optically stimulated luminescence (OSL) and infrared stimulated luminescence (IRSL) properties. Their TL, OSL and IRSL features are further supported by dose response measurements, in order to investigate their linearity behavior and to estimate their lowest detection dose limits (LDDL). The calcium sulfates under study -both of commercial and mineral origin- are additionally characterized by means of Fourier Transform Infrared spectroscopy (FTIR) and X-Rays Diffractometry (XRD).

### Acknowledgments

This work is supported by the Hellenic Foundation for Research and Innovation (HFRI) and the General Secretariat for Research and Technology (GSRT) for the HFRI PhD Fellowship grant (Grand Number: 22, Scholarship Code: 95546)

### References

- [1] G.S. Polymeris *et al.*, *Mediterr. Archaeol. Archaeom.*, **13** (2013)
- [2] Malletzidou *et al.*, *Radiat. Meas.*, **122** (2019)



## PIGE measurements at the Tandem Lab “Demokritos” – An overview

A. Lagoyannis<sup>1</sup>, K. Prektes – Sigalas<sup>1</sup>, M. Axiotis<sup>1</sup>, S. Harissopoulos<sup>1</sup>, M. Kokkoris<sup>2</sup>, T.J. Mertzimekis<sup>3</sup>, P. Misaelides<sup>4</sup>, N. Patronis<sup>5</sup>

<sup>1</sup> *Tandem Accelerator Laboratory, Institute of Nuclear and Particle Physics, N.C.S.R. "Demokritos", Aghia Paraskevi, 15310 Athens, Greece*

<sup>2</sup> *Department of Physics, National Technical University of Athens, Zografou Campus, 15780 Athens, Greece*

<sup>3</sup> *Faculty of Physics, University of Athens, Zografou Campus, 157.84 Athens, Greece*

<sup>4</sup> *Department of Chemistry, Aristotle University of Thessaloniki, 541.24 Thessaloniki, Greece*

<sup>5</sup> *Department of Physics, University of Ioannina, 45110 Ioannina, Greece*

Particle Induced Gamma – ray Emission (PIGE) is a widely used Ion Beam Analysis technique suitable for the detection and quantification of low Z elements in complex matrixes. While its use has started as early as the 1960's, its analytical power hasn't been full explored mainly because of the lack of suitable and reliable cross section data and dedicated computer codes for the analysis of the experimental results. IAEA has launched in 2012 a Coordinated Research Program aiming at curing these drawbacks and enhancing PIGE use. The Tandem Accelerator group, participating in this effort, has measured a number of gammas producing differential cross section data and made them available to the scientific community through the IBANDL database. Moreover, in an effort to validate the new results, as well as existing ones, a new method for benchmarking differential cross section data has been established. Finally, a new computer code named PiGreCo, has been developed in order to facilitate and spread PIGE use for the quantification of light elements. An overview of this ongoing effort will be presented.



## Angular Distribution of Elastic Neutron from $^{19}\text{F}$ and $^{12}\text{C}$ Targets

İsmail Hakkı SARPÜN<sup>1,2</sup>, Kemal TAŞDÖVEN<sup>1</sup>, İlkay TÜRK ÇAKIR<sup>3</sup>

<sup>1</sup>Akdeniz University, Physics Department, Antalya, Turkey

<sup>2</sup>Akdeniz University, Nuclear Sciences Res. and App. Center, Antalya, Turkey

<sup>3</sup>Giresun University, Physics Dept., Giresun, Turkey

Neutron elastic or inelastic scattering cross sections for light nuclei have been required for development of fusion reactor designs. Using TALYS 1.8 nuclear code, we have calculated neutron elastic angular distribution from  $^{19}\text{F}$  and  $^{12}\text{C}$  target nuclei at some energy. Theoretically evaluated cross section of elastic scattering have been presented in graphs and compared with experimental values which are available in EXFOR nuclear data library. Theoretically evaluated and experimental cross section values are in good agreement.



# Measurement of the Differential Elastic Scattering Cross Sections for Deuterons on Light Elements, at Energies and Angles Suitable for EBS

E. Ntemou<sup>1,2</sup>, M. Kokkoris<sup>1</sup>, A. Lagoyannis<sup>2</sup>, K. Prekete-Sigalas<sup>1,2</sup>

<sup>1</sup>*Department of Physics, National Technical University of Athens, Zografou campus, 15780 Athens, Greece*

<sup>2</sup>*Tandem Accelerator Laboratory, Institute of Nuclear Physics, N.C.S.R. "Demokritos" Athens, Greece*

Light elements find various technological applications in the industry. They are crucial in the field of material analysis due to their presence in glasses, ceramics, and polymers, while they are also frequently added in metallic alloys in order to improve their corresponding properties, such as, hardness, wear and heat resistance, or rigidity. Nitrogen and silicon are heavily used in the semiconductor and insulator technology, since the latter is the key component in wafers on which integrated circuits are built and the former is a common dopant for the creation of n-type semiconductor. Beryllium has also recently emerged as an important material in plasma facing components of controlled fusion devices, while lithium, due to the high neutron cross section (~940 barn) of <sup>6</sup>Li, that readily fissions, is the main source of tritium which is used in biochemical research, thermonuclear weapons and future controlled fission. Consequently, the accurate quantitative determination of light-element depth profile concentrations in a variety of matrices is of enormous importance in contemporary science and technology. This determination can best be accomplished via the implementation of IBA (Ion Beam Analysis) techniques and more specifically via ERDA (Elastic Recoil Detection Analysis), for ultra-thin surficial layers and NRA (Nuclear Reaction Analysis) due to the production of isolated peaks (due to the high Q-values involved) with negligible background. At the same time, the use of a deuteron beam provides high depth resolution, deep layer analysis and allows for the simultaneous study of most of the light isotopes/elements coexisting in a target. The implementation of d-NRA could be further greatly enhanced if one could also coherently analyze the elastic scattering spectra which are simultaneously acquired using the same experimental and electronics setup. However, the general applicability of d-EBS is still limited nowadays, mostly because of the lack of reliable and coherent datasets of differential cross-sections in literature for energies and angles suitable for IBA. Hence in the present work a comprehensive review is presented concerning results obtained over the last 3 years for deuteron elastic scattering on many important stable light elements and isotopes, such as <sup>6</sup>Li, <sup>7</sup>Li, <sup>9</sup>Be, <sup>nat</sup>N, <sup>19</sup>F, <sup>23</sup>Na, <sup>nat</sup>Si and <sup>31</sup>P at energies and angles suitable for analytical purposes. In several cases the obtained differential cross-section datasets were also benchmarked using thick targets of accurate stoichiometry. All measurements were carried out at the 5.5 MV Tandem Accelerator of N.C.S.R. "Demokritos", Athens, Greece. The experimental setup consisted of a high-precision goniometer, along with six silicon surface barrier (SSB) detectors (500μm in thickness). Most of the obtained differential cross-section datasets are already available to the scientific community via IBANDL (Ion Beam Analysis Nuclear Data Library - <https://www-ndc.iaea.org/exfor/ibandl.htm>)

## Acknowledgments

This work has been supported by the Greek Scholarship Foundation and has been funded by the "Doctoral Research Financial Support" Act from resources of the OP "Development of Human Resources, Education and Lifelong Learning" 2014-2020, which is co-funded by the European Social Fund-ESF and the Greek Government.



## gSPEC at FAIR

T.J. Mertzimekis

*Department of Physics, National Kapodistrian University of Athens, Zografou Campus, Athens*

Nuclear electromagnetic moments are extremely sensitive probes of nuclear structure providing critical information on the nuclear wavefunctions the shapes of nuclei. The importance of moments measurements is more than ever highlighted today by the urge to understand the evolution of structure at the extremes of the nuclear chart, which are almost completely unexplored. FAIR is a flagship European nuclear facility under construction, which aims at producing currently unavailable exotic species, laying grounds for new and important discoveries on both proton– and neutron–rich sides of the isotopic chart regarding nucleon-nucleon interaction, magic shells, deformation, and shape evolution/coexistence among others.

gSPEC is a recently proposed experimental apparatus at FAIR to focus on magnetic moments measurements. The experimental setup will incorporate the state-of-the-art segmented DEGAS detectors in an optimized configuration inside a strong magnet. The novel physics cases targeted by gSPEC, the technical design and challenges, as well as preliminary R&D work will be reported.

### Acknowledgments

Partial support from a CNRS research grant (mission No.12270) is acknowledged



## HFB Calculations for Nucleon Densities of Nickel Isotopes

İsmail Hakkı SARPÜN<sup>1,2</sup>, Ferhan AKDENİZ<sup>1</sup>, Zeynep S. TURHAN İRAK<sup>3</sup>, Eyyup TEL<sup>4</sup>

<sup>1</sup>Akdeniz University, Physics Department, Antalya, Turkey

<sup>2</sup>Akdeniz University, Nuclear Sciences Res. and App. Center, Antalya, Turkey.

<sup>3</sup>Igdir University, Igdir, Turkey

<sup>4</sup>Osmaniye Korkut Ata University, Physics Department, Osmaniye, Turkey

The ground state properties of the nuclei are generally calculated using two different methods, namely Skyrme-Hartree-Fock (SHF) and the Skyrme-Hartree-Fock-Bogolyubov (SHFB) methods. In this study, the densities and rms radii for both proton and neutron of Nickel isotopes were calculated using Hartree-Fock-Bogolyubov method with different Skyrme set parameters, especially SLy4, SkM\*, and SIII set parameters. Theoretical calculated charge density compared with experimental data of Angeli and Marinova (2013).



## Measurement of the $^{203}\text{Tl}(\text{n}, 2\text{n})^{202}\text{Tl}$ reaction cross section at 17.7 MeV and 19.3 MeV


G.Alamanos<sup>1</sup>, A.Kalamara<sup>1</sup>, A.Stamatopoulos<sup>1</sup>, R.Vlastou<sup>1</sup>, M.Kokkoris<sup>1</sup>,  
M.Axiotis<sup>2</sup>, A.Lagoyannis<sup>2</sup>

<sup>1</sup> *Technical University of Athens, Department of Physics, Zografou Campus GR-157 80 Zografou Attikis GREECE*

<sup>2</sup>*NCSR “Demokritos”, Institute of Nuclear Physics, Patr. Gregoriou E & 27 Neapoleos Str, 15341 Agia Paraskevi, GREECE*

The cross section of the reaction  $^{203}\text{Tl}(\text{n}, 2\text{n})^{202}\text{Tl}$ , has been measured by the activation method, at neutron energies 17.7 MeV and 19.3 MeV, relative to the  $^{197}\text{Au}(\text{n}, 2\text{n})^{196}\text{Au}$  and the  $^{93}\text{Nb}(\text{n}, 2\text{n})^{92\text{m}}\text{Nb}$  reference reaction cross sections. The monoenergetic neutron beam was produced at the 5.5 MV Tandem accelerator of NCSR Demokritos, by means of the  $^3\text{H}(\text{d}, \text{n})^4\text{He}$  reaction, implementing a Ti-tritiated target consisted of 2.1 mg/cm<sup>2</sup>Ti-t layer on a 1 mm thick Cu backing for good heat conduction. The target assembly was placed at about 2 cm from the tritium target thus limiting the angular acceptance to  $\pm 15^\circ$ , where the produced neutrons are practically isotropic and monoenergetic. The flux variation of the neutron beam was monitored by a  $\text{BF}_3$  detector placed at a distance of 3 m from the neutron source and a BC501A liquid scintillator.

After the end of the irradiation, the activity induced by the neutron beam at the target and reference foils was measured by a HPGe detector of 50% relative efficiency, which was properly shielded with lead blocks in order to reduce the contribution of the natural radioactivity. Monte Carlo simulations implementing the MCNP code have been carried out in order to account for gamma-ray self-absorption effects as well as for the estimation of the neutron flux by means of the reference foils.



## Production of Isotopes of medical interest in $p + ^{nat}Mo$ reactions

Despoina Armaanidou<sup>1</sup>, N.G. Nicolis<sup>1</sup> and G.A. Souliotis<sup>2</sup>

<sup>1</sup> Department of Physics, University of Ioannina, Ioannina, Greece

<sup>2</sup> Laboratory of Physical Chemistry, Department of Chemistry, University of Athens, Athens, Greece

Presenting author email: peniarm@gmail.com

### Abstract

Medical radioisotopes are used to label some special chemical compounds to form radiopharmaceuticals, which are used extensively in the field of nuclear medicine in three main branches: i) diagnostic procedures, resulting in images of the involved organs via emission tomography, ii) radionuclide techniques that are used for the analysis of important substances in blood or tissue samples, and iii) radiation therapy, where the tissues or organs are treated with radiation and restored to their normal functions.

In the present work, we study the production of molybdenum and technetium isotopes motivated by their uses in nuclear medicine. Excitation functions of interest involve:  $^{nat}Mo(p,x)^{99}Mo$ ,  $^{nat}Mo(p,x)^{94g}Tc$ ,  $^{nat}Mo(p,x)^{95g}Tc$ ,  $^{nat}Mo(p,x)^{96(m+g)}Tc$  and  $^{nat}Mo(p,x)^{99m}Tc$ . We present a comparison between recently published experimental data [1] with theoretical calculations using the code TALYS [2]. We discuss the role of various Mo isotopes in the natural Mo target on the production yields.

### References

- [1] A. A. Alharbi et al., *Medical Radioisotopes Production: A Comprehensive Cross-Section Study for the Production of Mo and Tc Radioisotopes Via Proton Induced Nuclear Reactions on <sup>nat</sup>Mo*, url: <https://www.researchgate.net/publication/221920012>
- [2] A.J. Koning, S. Hilaire, M.C. Duijvestijn, TALYS-1.0, in: *Proceedings of the International Conference On Nuclear Data for Science and Technology*, Nice, France, April 22–27 (2007), O. Bersillon, F. Gunsing, E. Bauge, R. Jaqmin, S. Leray, (Eds.), EDP Science (2008) p.211, url: <http://www.talys.eu/>



## **$^{112}\text{Sn}$ , $^{114}\text{Sn}$ , $^{118}\text{Sn}$ and $^{124}\text{Sn}$ ( $\gamma$ , n) average cross section measurement near to reaction threshold compared with TALYS theoretical calculations**

E. Vagena, D. Barmpas, S. Stoulos

*Nuclear Physics Lab., School of Physics, Aristotle University of Thessaloniki, Greece*

Bremsstrahlung photon beam delivered by linear electron accelerator has been used to determine the near threshold photonuclear cross section data of nuclides. The ( $\gamma$ , n) cross section data was obtained for the astrophysical important isotopes of Tin [ $^{112}\text{Sn}$ ,  $^{114}\text{Sn}$ ,  $^{118}\text{Sn}$  and  $^{124}\text{Sn}$ ]. Moreover, theoretical calculations have been applied using the TALYS 1.6 code. The photon flux was monitored by measuring the photons yield from seven well known ( $\gamma$ , n) reactions from the threshold energy of each reaction up to the end-point energy of the photon beam used. An integrated cross-section  $39 \pm 8$  mb is calculated for the photonuclear reaction  $^{112}\text{Sn}$  ( $\gamma$ , n) at the energy 10.8 - 14 MeV. The integrated cross-section of  $^{114}\text{Sn}$  ( $\gamma$ , n) reaction at the energy 10.3 - 14 MeV was also estimated  $54 \pm 11$  mb while the integrated cross-section of  $^{118}\text{Sn}$  ( $\gamma$ , n) reaction at the energy 9.3 - 14 MeV was determined as well  $1.1 \pm 0.4$  mb. Moreover, an integrated cross-section  $73 \pm 9$  mb is calculated for the photonuclear reaction  $^{124}\text{Sn}$  ( $\gamma$ , n) at the energy 8.5 - 14 MeV. The average cross section estimated using the TALYS code were  $45 \pm 7$  mb for  $^{112}\text{Sn}$ ,  $47 \pm 6$  mb of  $^{114}\text{Sn}$ ,  $1.8 \pm 0.3$  mb of  $^{118}\text{Sn}$  and  $65 \pm 8$  mb of  $^{124}\text{Sn}$ . A satisfactorily reproduction of the available experimental data of photonuclear cross section at the energy region below 20 MeV could be achieved. The data obtained were compared with the experimental published data  $31 \pm 5$  mb of  $^{112}\text{Sn}$ ,  $65 \pm 9$  mb of  $^{114}\text{Sn}$  and  $75 \pm 8$  mb of  $^{124}\text{Sn}$  [1]. A good agreement between the previous and these new experimental results of  $^{112}\text{Sn}$ ,  $^{114}\text{Sn}$ , and  $^{124}\text{Sn}$  is presented, while the  $^{118}\text{Sn}$  ( $\gamma$ , n) average cross sections is measured for the first time.

### **References**

[1] V.V. Varlamov, B.S. Ishkhanov, V.N. Orlin, V.A. Tchetvertkova, Bull. Russian Academy of Sciences – Physics, 74 (2009) 833




## Cross-section measurements of the reaction $^{107}\text{Ag}(\text{p}, \text{n})^{107}\text{Cd}$ at energies inside the Gamow window

K. Bosbotinis, A. Khaliel\*, T.J. Mertzimekis

*Department of Physics, National Kapodistrian University of Athens, Zografou Campus, Athens*

We report on experimentally deduced cross sections of the  $^{107}\text{Ag}(\text{p}, \text{n})^{107}\text{Cd}$  reactions at energies inside the astrophysically relevant Gamow window. A beam of protons was accelerated at three energies, namely 2.2, 3.5 and 4 MeV, by the Tandem Van De Graaff Accelerator of the INPP, NCSR “Demokritos” and impinged a thin target of  $^{nat}\text{Ag}$  inducing a transfer reaction. The de-exciting  $^{107}\text{Cd}$  nuclei emitted characteristic  $\gamma$  radiation recorded in three high-purity Germanium (HPGe) detectors of 100% relative efficiency, placed at  $0^0$ ,  $90^0$ ,  $165^0$  with respect to the incident proton beam.

The deduced in-beam cross sections have been compared to existing measurements for the two higher energies (3.5 and 4 MeV) and found in fair agreement within the experimental error. An existing energy threshold at 2.2 MeV of the reaction did not allow for a cross section at the lower energy point. The data can be used to fine tune theoretical models in a region of the nuclear chart where reaction rates are relatively unknown. To that direction, the present results are compared to predictions of the the Haussler–Feshbach statistical model performed with the latest TALYS code (v1.9).



## Retention of Radionuclides onto Natural (Raw and Modified) Materials

A. Charizani, E. Papalanis, E. Kapashi, P. Tsamos, F. Noli

*Department of Chemistry, Aristotle University of Thessaloniki, GR-54124 Thessaloniki*

In this work the possibility of retention of radionuclides onto natural materials it was investigated with application of nuclear spectrometry techniques. The natural materials used for the sorption of uranium and thorium from aqueous solutions of different initial concentrations were bentonite (a clay mineral) and wastes of pomegranate. The sorption of europium and barium, which can be studied as analogues of the trivalent actinides and radium respectively, was also investigated. The concentration of the metals in the solution was determined with gamma- and alpha-spectrometry using radioactive tracers.

The materials (sorbents) were used in raw form and after modification. Bentonite was studied for removal of uranium cationic species and after chemical modification for removal of uranium anionic species respectively in different pH region. The modification of pomegranate wastes with acidic and alkaline reagents was tested as a possible method for increasing the sorption capacity.

The effect of various parameters such as pH, sorbent dosage, concentration and time on the sorption capacity of the materials was also explored as well as the presence of competitive ions and humic acid in the solution. The results demonstrated that the investigated materials are low cost and efficient sorbents with possible applications in nuclear waste management.



## Characterization of “Neoptolemos”\*

E. Daoulas<sup>1</sup>, M. Axiotis<sup>2</sup>, S.V. Harissopoulos<sup>2</sup>, M. Kokkoris<sup>1</sup>, A. Lagoyannis<sup>2</sup>

<sup>1</sup> Department of Physics, National Technical University of Athens, Zografou Campus, 15780 Athens, Greece

<sup>2</sup> Tandem Accelerator Laboratory, Institute of Nuclear and Particle Physics, N.C.S.R. “Demokritos”, Aghia Paraskevi, 15310 Athens, Greece

The study of charged particle capture reactions is of major importance for the understanding of the production of p-nuclei. The term p-nuclei refer to 35 stable neutron-deficient nuclei, from  $^{74}\text{Se}$  to  $^{196}\text{Hg}$ . The p-process nucleosynthesis models developed in order to reproduce the p-nuclei abundances incorporate a network of more than 20000 nuclear reactions. These models fail in the case of the light p-nuclei. Apart from improvements of the astrophysical models it is important to reduce the uncertainties originating from nuclear physics parameters entering in the calculations and thus the measurement of cross-sections of particle capture reactions in medium-mass nuclei.

One of the techniques developed for this kind of studies, is the so-called  $\gamma$ -ray angle-integrated. This in-beam method is based on the use of a large volume NaI(Tl) detector which combines the high efficiency of  $\gamma$ -ray detection with a  $4\pi$  geometry. The working principle of such a detector relies on its large volume and its long response time (400 ns). The latter leads to the detection of the sequential photons emitted in a  $\gamma$ -cascade as one “event” with energy equal to the sum of the energies of the involved photons. Of imperative importance is the determination of the efficiency of the setup, which is not trivial as it depends both on the sum-energy of the event and on its multiplicity.

In the present work the characterization of such a detector, the “Neoptolemos” setup, located at the Tandem Accelerator Laboratory of the Institute of Nuclear and Particle Physics of the N.C.S.R. “Demokritos”, is presented. “Neoptolemos” consists of a cylindrically shaped NaI(Tl) crystal 14 x 14 inches (length x diameter) segmented in two optically isolated parts. In order to determine the summing efficiency of the setup, a code based on the GEANT4 simulation toolkit was developed, incorporating the full detector geometry. Some preliminary simulation results along with their comparison to radiation source measurements for verification will be presented.

### References

- [1] A. Spyrou, H.-W. Becker, A. Lagoyannis, S. Harissopoulos, and C. Rolfs, *Physical Review* **C76**, 015802 (2007).
- [2] GEANT4: A simulation Toolkit, S. Agostinelli *et al*, *Nucl. Instr. Meth.* **A506** (2003) 250-303.



## Isotope production in 1-200 MeV p + $^{54-58}\text{Fe}$ reactions

Ioannis S. Despoudis<sup>1</sup>, N.G. Nicolis<sup>1</sup> and G.A. Souliotis<sup>2</sup>

<sup>1</sup> Department of Physics, University of Ioannina, Ioannina, Greece

<sup>2</sup> Laboratory of Physical Chemistry, Department of Chemistry, University of Athens, Athens, Greece

Presenting author email: johnnitoy@protonmail.ch

Natural iron is an important structure material because of its use in alloys employed in various low and high-energy physics applications. Natural iron occurs with an isotopic composition of  $^{54}\text{Fe}$  (5.85%),  $^{56}\text{Fe}$  (91.75%),  $^{57}\text{Fe}$  (2.12%) and  $^{58}\text{Fe}$  (0.28%). The study of proton-induced reactions on natural Fe provides information on the behavior of the material under bombardment and the production of various isotopes. Reactions with isotopically enriched targets indicate the conditions for optimal production of a particular isotope.

In the present work, we study the production cross section of  $^{51}\text{Cr}$ ,  $^{52}\text{Fe}$ ,  $^{52,54}\text{Mn}$ ,  $^{55,56,57}\text{Co}$  in proton-induced reactions on  $^{nat}\text{Fe}$ . Experimental cross sections [1] are compared with calculations performed with the code TALYS [2]. Having established a good description of the p +  $^{nat}\text{Fe}$  reaction, we examine the dependence of production cross sections on the neutron excess of the Fe natural isotopes. We also compare the predictions of the code TALYS with an alternative approach that combines the intranuclear cascade code ISABEL [3,4] with the sequential binary decay code MECO [5].

### References

- [1] Kwangsoo Kim, Mayeen Uddin Khandaker, Haladhara Naik and Guinyun Kim, *Nucl. Inst. Meth. Phys. Res. B* 322 (2014) 63-69.
- [2] A.J. Koning, S. Hilaire, M.C. Duijvestijn, TALYS-1.0, in: *Proceedings of the International Conference On Nuclear Data for Science and Technology*, Nice, France, April 22–27 (2007), O. Bersillon, F. Gunsing, E. Bauge, R. Jaqmin, S. Leray, (Eds.), EDP Science (2008) pp. 211–214, Available from: <<http://www.talys.eu/download-talys/>>.
- [3] Y. Yariv and Z. Fraenkel, *Phys. Rev.* C20, 2227 (1979).
- [4] Y. Yariv and Z. Fraenkel, *Phys. Rev.* C24, 488 (1981).
- [5] N.G. Nicolis, *Int. J. Mod. Phys.* E17, 1541-1556 (2008).



## Comparative dosimetric radiotherapy analysis in rectal cancer

Giagtzis Smaragdi<sup>1,2</sup>, Softa Vasiliki<sup>1,2</sup>, Stoulos, Stylianos<sup>2</sup>, Makridou Anna<sup>1</sup>, Mponiou Konstantina<sup>3</sup>, Iliopoulou Chrysoula<sup>3</sup>, Charalampidou Martha<sup>3</sup>


<sup>1</sup>*Medical Physics Department, Cancer Hospital of Thessaloniki “Theagenio”*

<sup>2</sup>*Aristotle University of Thessaloniki*

<sup>3</sup>*Radiation Oncology Department, Cancer Hospital of Thessaloniki “Theagenio”*

Radiation therapy is an effective and safe method of treating neoplasm. The use of preoperative radiotherapy in locally advanced rectal cancer may increase total survival and reduce the local recurrence. The aim of this study is the comparative dosimetric analysis of four different radiotherapy techniques, 3DCRT (3D Conformal Radiation Therapy), IMRT (Intensity Modulated Radiotherapy) with the use of three and four radiation beams, and VMAT (Volumetric Modulated Arc Therapy) in rectal cancer.

It was proved that the bladder's minimum dose is significantly lower in the VMAT technique versus the other methods ( $p = 0.003$   $F = 2.38 > F_{crit} = 1.69$ ). A reluctant tendency of the minimum dose for head and neck seems to exist with the IMRT technique with both three and four field ( $p = 0.000318$ ,  $F = 9.120995 > F_{crit} = 3.135918$ ). For bowel bag lower doses were observed with the IMRT technique ( $p = 0.003$   $F = 0.000318 > F_{crit} = 3,135,918$ , while there was no statistically significant difference for the PTV50 volume in terms of the median dose. The Conformity Index (CI) in DMLC technique was higher than the other methods while there is no significant difference in the Homogeneity Index (HI), even though VMAT technique achieved better homogeneity. Finally, irradiation time with the VMAT is significantly lower.



## Hot particles in air filters collected in Finland immediately after the Chernobyl accident

J. Paatero<sup>1</sup>, F. Groppi<sup>2</sup>, A. Ioannidou<sup>3</sup>

<sup>1</sup>Finnish Meteorological Institute, (FMI), Observation Services, P.O. Box 503, Helsinki FI-00101, Finland

<sup>2</sup>Università degli Studi di Milano, Physics Department, LASA Lab, Segrate (MI), 20090 Italy

<sup>3</sup>Aristotle University of Thessaloniki, Physics Department, Thessaloniki 54124 Greece

Following the accident at the Chernobyl nuclear power plant on 26 April 1986, about  $2 \times 10^{18}$  Bq of condensable radioactive materials were released, the majority of which was deposited in Europe (IAEA, 1986). Most of the released radioactive material was in particulate form, whereas noble gases and most of iodine were in gaseous form. Sometimes their activities may be so high that even a single particle may cause a severe health hazard. Radioactive particles released from Chernobyl have been described by many as “hot particles” where “hot” is synonymous with “highly radioactive”.

In the Chernobyl accident most of the particulate material was deposited within 20 km of the plant, but about one-third was transported even thousands of kilometres. Air masses originating from Chernobyl on 26 April 1986 arrived in Finland very early after the accident (Pollanen et al., 1997).

Identification of the hot particles in filters collected in Helsinki Finland between 26-28 April 1986 was done by autoradiography technique (Cyclone Plus of PerkinElmer) in the University of Milano, Italy. Morphology and elemental information for particle characterization will be given by SEM analysis.

### References

IAEA (1986). Safety Series No. 75-INSAG-1. Summary report on the post Hot particles from Chernobyl accident review meeting on the Chernobyl accident. International Atomic Energy Agency, Vienna.

Pöllänen, R., Valkama, I., Toivonen, H. 1997. Transport of radioactive particles from the Chernobyl accident. *Atmosph. Environ.* 31(21), 3575-3590.

## Application of Nuclear Spectrometry Techniques for the Investigation of the Sorption of Radionuclides

E. Kapashi<sup>1\*</sup>, M. Kapnisti<sup>2</sup>, F. Noli<sup>1</sup>

<sup>1</sup> Department of Chemistry, Aristotle University of Thessaloniki, GR-54124 Thessaloniki


<sup>2</sup> International Hellenic University, P.O BOX 141 GR-574 00 Thessaloniki

Radioactive pollutants present in liquid wastes can be removed by using agricultural byproducts as sorbents. The sorption of uranium, thorium and barium (which is used as analogue of the radium) was explored using a batch technique in aqueous solutions of different initial concentrations. The investigation was performed with gamma- and alpha-spectrometry using radioactive tracers as well as optical spectroscopy (UV-Vis).

Recycling and modification of *Aloe-Vera* was tested as a possible method for the production of biosorbents. The modification was achieved after chemical treatment with acidic and alkaline reagents.

The overall objective of this study was first, to apply nuclear spectrometric techniques for determination of the sorption capacity and second, to investigate whether sorbents based on agricultural wastes could be used for the removal of radionuclides from low level wastewater.

The results showed significant sorption capacity of the tested materials for most of the radionuclides under investigation demonstrating that it is possible to use them for applications in radioecology.

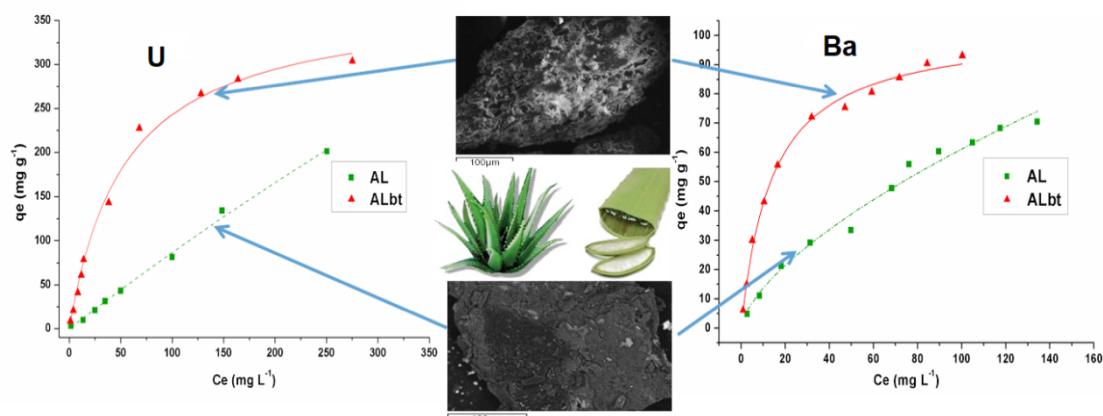



## Environmental monitoring programme around a phosphogypsum disposal area

K. Kehagia, D.C. Xarchoulakos, K. Karfopoulos and C. Potiriadis


Department of Environmental Radioactivity, Greek Atomic Energy Commission  
P.O. Box 60092, 15310, Agia Paraskevi, Greece

Radionuclides of natural origin of the Uranium and Thorium series and the Potassium-40 are present in most materials. These materials are commonly referred to as Naturally Occurring Radioactive Materials (NORMs). In Greece there are few industries involving NORM, among which 3 fertilizer industries of which only one is still in operation. This industry has been under operation since 1965 and is located in the northern part of Greece.

The aim of this work is to present the annual monitoring programme of this industry as it has been designed and systematically implemented since 2003 by the Environmental Radioactivity Department of the Greek Atomic Energy Commission (EEAE), that is the national competent authority for the control, regulation and supervision in the fields of nuclear energy, nuclear technology, radiological and nuclear safety and radiation protection.

The phosphogypsum produced by the industry is deposited continuously near the industry, by the sea side, in an open land disposal area of about 500000 m<sup>2</sup>. The estimated phosphogypsum mass is about 13 million tons. Thus, emphasis is given on the measurements of the ground waters. Ground water samples are received from 20 drills distributed around the disposal area. The concentration of <sup>226</sup>Ra and uranium isotopes is determined in each sample by alpha spectrometry measurements.

Finally, after an EEAE recommendation, a drainage channel was constructed around the phosphogypsum disposal area in order to prevent the underground runoffs. The influence of this channel on the above mentioned measurements is presented.



## A Comparative Study of Stopping Power Calculations Implemented in Monte Carlo Codes and Compilations \*

E. Vagena<sup>1</sup>, E. Androulakaki<sup>2</sup>, M. Kokkoris<sup>2</sup>, N. Patronis<sup>1</sup>

<sup>1</sup> Department of Physics, University of Ioannina, 45110 Ioannina, Greece

<sup>2</sup> Department of Physics, National Technical University of Athens, Zografou Campus, 15780 Athens, Greece

The stopping power calculations, inherently implemented in all widely used, general purpose Monte Carlo codes, play a critical role in the determination of any expected reaction yield, when charged particles are present either as beam particles or reaction products. Small changes in the stopping power values, and therefore in the corresponding particle energies, can lead to significant changes in the cross sections involved. This effect may be critical in a variety of problems, ranging from detector physics to dose calculations and – to the authors' best knowledge – it has never been thoroughly investigated in the past.

Thus, the aim of the present work is to examine the differences in the stopping power calculations between GEANT4, FLUKA, MCNP/MCNPX and PHITS and to compare the results (whenever possible) against the widely used and partially benchmarked stopping power compilations, as implemented in the SRIM2013, PSTAR and ASTAR (ICRU) codes. In the particular case of GEANT4, most of the available models for the electromagnetic interactions were independently tested.

More specifically, in all Monte Carlo codes, protons, alpha particles,  $^{12}\text{C}$ ,  $^{16}\text{O}$  and  $^{56}\text{Fe}$  ions were generated as beam particles in the energy range between 1 and 1000 MeV/u and were subsequently transported, impinging on a variety of infinitely thick, pure, single-element targets, such as aluminum, iron, copper and silicon, which are typically used as shielding materials or components in complex devices. Water was also examined, being a close substitute for biological tissue. In all the simulations the process of multiple scattering was disabled, while, in certain cases, tables with stopping power values were generated for comparison. The obtained results show large discrepancies for specific beam particle – target combinations in certain energy ranges. They also deviate, especially at low energies, from the SRIM2013, PSTAR and ASTAR predictions. The final values are presented in graphical form and the observed similarities and discrepancies are discussed and analyzed. Since stopping power calculations have not yet been fully benchmarked against experimental data over a broad energy range, the final assessment of the obtained results relies on the user.

### Acknowledgments

The authors acknowledge the financial support from the European Space Agency (Contract No. 4000112863/14/NL/HB).

## Radiation dose response of TL dosimeters at elevated temperatures

P. Konstantinidis, E. Tsoutsoumanos, G. Kitis

*Nuclear Physics Laboratory, Aristotle University of Thessaloniki, 54124, Greece*

In the present work we investigate the sensitivity of the main dosimetric thermoluminescence (TL) peak of various dosimeters to ionizing radiation [1]. Specifically, we studied the radiation dose response of the main dosimetric peak as a function of the irradiation temperature between room temperature and 230°C. The studied dosimeters were of the Lithium Fluoride family (LiF: Mg<sup>+</sup>, Ti<sup>+</sup>), Beryllium Oxide (BeO: Li<sup>+</sup>, Al<sup>+</sup>) and Calcium Sulfate (CaSO<sub>4</sub>: Tm<sup>+</sup>, Dy<sup>+</sup>). In the case of LiF: Mg<sup>+</sup>, Ti<sup>+</sup>, which is the most commonly used dosimeter, two different families were investigated, namely the Harshaw-Bicron (TLD-600, TLD-700) and the Polish (MTS-600, MTS-700) [2]. All experimental complex TL glow curves were analyzed into individual peaks using a computerized glow curve deconvolution (CGCD) analysis.

Characteristic examples of TL glow curves obtained at various temperatures are shown in Fig.1. On the other hand, the integrated signals of the dosimetric peak 5 obtained by the CGCD analysis are shown in Fig.2 for all the species of LiF dosimeters. An increase of the TL response at the irradiation temperature around 110°C is observed.


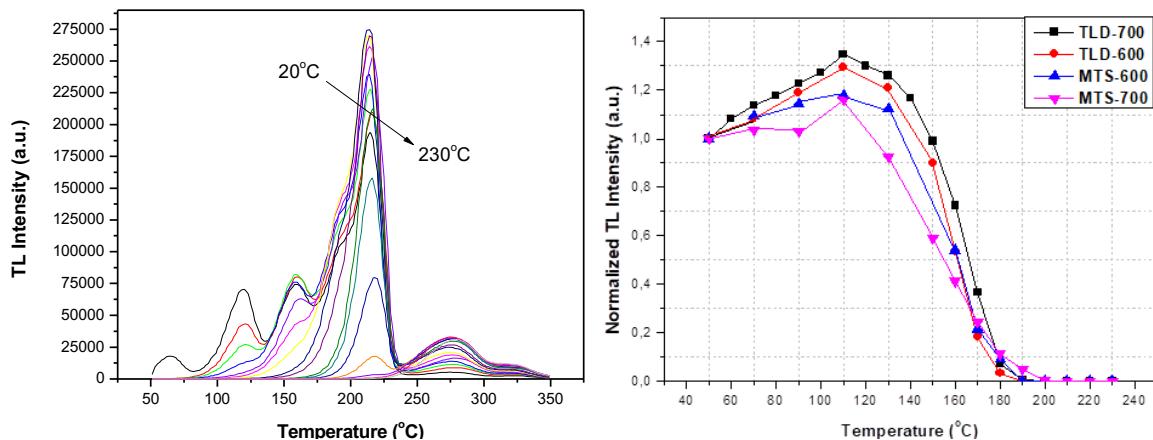


Figure 1 (left): TL intensities versus Temperature for TLD-700 for the dose of 1.9 Gy.

Figure 2 (right): Normalized TL intensities of peak 5 for all four samples of LiF family.

### References

- [1] Mahesh K., Weng P.S., Furetta C. 1989. Thermoluminescence in Solids and its Applications, Nuclear Technology Publishing Ashford, England (U.K.)
- [2] Sadek A.M., F. Khamis, George S. Polymeris, E. Carinou, G. Kitis. 2017. Similarities and differences between two different types of the thermoluminescence dosimeters belonging to the LiF family, Phys. Status Solidi C 14, 1600220.



# $^{137}\text{Cs}$ vertical distribution at the Aegean sea: a study on mixing and advection of seawater masses

P. Livadaros<sup>1,2,3</sup>, C. Tsabaris<sup>1</sup>, F.K. Pappa<sup>1</sup>, D.L. Patiris<sup>1</sup>, G. Eleftheriou<sup>1</sup>, E. Krasakopoulou<sup>2</sup>, V. Zervakis<sup>2</sup>, M. Dassenakis<sup>3</sup>

<sup>1</sup> Institute of Oceanography, Hellenic Centre for Marine Research

<sup>2</sup> Department of Marine Sciences, University of Aegean,

<sup>3</sup> National and Kapodistrian University of Athens,

Oceanographic phenomena can be studied using radiometric techniques as complementary tools in oceanographic measurements. A work combining radiometry and oceanography has been implemented previously in deep basins of Aegean Sea [1] and at the deep Cretan basin in May of 2014 [2].


In this work radiological measurements were performed in samples collected from 7 stations of the Aegean Sea, during March 2017. The primary goal was to determine the activity concentration of  $^{137}\text{Cs}$  and to study the seawater mixing processes through the vertical distribution of  $^{137}\text{Cs}$  in the deep basins of Aegean Sea. The activity concentrations of  $^{137}\text{Cs}$  were combined with oceanographic data (salinity (S), temperature ( $\Theta$ ), dissolved oxygen (DO)) to identify the water masses.

Previous measurements of  $^{137}\text{Cs}$  and corresponding oceanographic data were also utilized in order to investigate the water mass interactions, mixing and circulation. The long lifetime of  $^{137}\text{Cs}$ , the absence of recent  $^{137}\text{Cs}$  inputs in the Aegean Sea (e.g. nuclear tests, nuclear accidents), as well as the fact that it is mainly in soluble phase in the seawater column, makes this tracer the most appropriate to study oceanographic processes and interactions of the different water masses in the Aegean Sea.

The  $\Theta/\text{S}$  and  $\text{Cs}/\text{S}$  diagrams were created and identified the characteristic water masses, their movement and their transformations.  $^{137}\text{Cs}$  has been effectively used for the study of the water masses at the Aegean Sea.

## References

- [1] Tsabaris C, Zervakis V, Kaberi H, Delfanti R, Georgopoulos D, et al. (2014)  $^{137}\text{Cs}$  vertical distribution at the deep basins of the North and Central Aegean Sea, Greece, *Journal of Environmental Radioactivity* 132: 47–56.
- [2] Livadaros, P. Diploma Thesis, Distribution of  $^{137}\text{Cs}$  in the Cretan Sea: An exploration of the mixing and movement of marine masses, Department of Marine Sciences, University of Aegean, July 2017.



## Radiological Characterization of Contaminated Pipes of Different Dimensions and Densities

Dimitrios Mavrikis<sup>1,2</sup>, Angelos Markopoulos<sup>1</sup>, Alexandra Ioannidou<sup>2</sup>, Anastasia Savidou<sup>1</sup>

<sup>1</sup> *National Centre for Scientific Research “Demokritos”,*

*Institute of Nuclear & Radiological Sciences & Technology, Energy and Safety, Radioactive Materials Management Laboratory*

<sup>2</sup>*Aristotle University of Thessaloniki, Physics Department, Nuclear Physics and Elementary Particle Physics Division*

The present work concerns a preliminary work for development of a technique for radiological characterization and segregation of raw historical radioactive waste in different management routes.

The efficiency of a 3x3 NaI (Tl) detector for a contaminated pipe - detector configuration was evaluated by Monte Carlo simulations performed by using the MCNP code.

Three activity distributions at the internal surface of the pipe were modelled: i) homogeneous activity distribution ii) over a ring at the one edge iii) over a ring at the middle. The non-homogeneous activity distributions represent the worst envisaged cases of inhomogeneity. The models were validated against experimental measurements [1].

The measurements bias due to possible inhomogeneity in the distribution of the activity was examined for pipes of different density and dimensions.

### References

[1] A. Savidou *et al.*, Nuclear Technology & Radiation Protection: Vol 25, No.2, pp. 133-137, (2010)



## **$^{198}\text{Hg}(\text{n},2\text{n})^{197\text{m}}\text{Hg}$ reaction cross sections at 17.7 and 19.3MeV**

**E.Mourati, A.Kalamara<sup>1</sup>, M.Kokkoris<sup>1</sup>, R.Vlastou<sup>1</sup>, Th.Stamatopoulos<sup>1</sup>, M.Axiotis<sup>2</sup> and A.Lagoyannis<sup>2</sup>**

<sup>1</sup>*Technical University of Athens, Department of Physics, Zografou Campus GR-157 80  
Zografou Attikis GREECE*

<sup>2</sup>*NCSR "Demokritos", Institute of Nuclear Physics, Patr. Gregoriou E & 27 NeapoleosStr, 15341  
AgiaParaskevi, GREECE*

The cross-section of  $^{198}\text{Hg}(\text{n}, 2\text{n})^{197\text{m}}\text{Hg}$  nuclear reaction was measured for neutron energy 17.7MeV and 19.3MeV by the activation method with respect to the  $^{27}\text{Al}(\text{n},\alpha)^{24}\text{Na}$ ,  $^{93}\text{Nb}(\text{n}, 2\text{n})^{92\text{m}}\text{Nb}$  and  $^{197}\text{Au}(\text{n},2\text{n})^{196}\text{Au}$  reference reactions. In this energy region there are no experimental data available in literature, while at lower energies, below 15 MeV, the existing data are scarce and discrepant. The high-energy neutron beam was produced by means of the  $^3\text{H}(\text{d},\text{n})^4\text{He}$  reaction using a Ti-tritiated target of 373 GBq activity,in the Tandem Van der Graaf 5.5MV accelerator of the National Center for Scientific Research "Demokritos". The target assembly was placed at about 2 cm from the tritium target, limiting the angular acceptance to  $\pm 15^\circ$ , so that the produced neutrons were practically isotropic and monoenergetic. The flux variation of the neutron beam was monitored by a  $\text{BF}_3$  detector placed at a distance of 3 m from the neutron source and a BC501A liquid scintillator. After the end of the irradiation, the target and reference foils were measured with gamma-ray spectroscopy implementing HPGe detectors of 16%, 50% and 80% absolute efficiencyies. The  $^{198}\text{Hg}(\text{n}, 2\text{n})^{197\text{m}}\text{Hg}$  reaction is contaminated by the  $^{199}\text{Hg} (\text{n},3\text{n})^{197\text{m}}\text{Hg}$  reaction. Theoretical calculations based on the EMPIRE code were used to estimate the contribution of the contaminant reaction and deduce the corrected cross section of the  $^{198}\text{Hg}(\text{n}, 2\text{n})^{197\text{m}}\text{Hg}$  reaction.



## Development of a semi-empirical calibration method by using a LaBr<sub>3</sub>(Ce) scintillation detector for NORM samples analyses

Eleni Ntalla<sup>1,3</sup>, Angelos Markopoulos<sup>1</sup>, Konstantinos Karfopoulos<sup>2</sup>, Constantinos Potiriadis<sup>2</sup>,  
Alexandros Clouvas<sup>3</sup> and Anastasia Savidou<sup>1</sup>

<sup>1</sup>*Institute of Nuclear & Radiological Sciences & Technology, Energy & Safety, National Center for Scientific Research "Demokritos", Athens, Greece*

<sup>2</sup>*Greek Atomic Energy Commission, Athens, Greece*

<sup>3</sup>*Department of Electrical and Computer Engineering, Aristotle University of Thessaloniki, Thessaloniki, Greece*

The last decade LaBr<sub>3</sub>(Ce) scintillation detectors have become commercially available and are very promising due to their high light yield ( $> 65000$  photons/MeV) that results in a better energy resolution compared to NaI(Tl) detectors ( $< 3\%$  FWHM at  $^{137}\text{Cs}$ ), their decay time of 35 ns and their material density (5.29 g/cm<sup>3</sup>) [1, 2]. Also, there is no need for nitrogen cooling and it is easier to be simulated comparing to HPGe detectors. Thus, LaBr<sub>3</sub>(Ce) detectors could be a suitable choice for environmental radiation monitoring [3] and in-situ measurements of NORM [4].


In this study, a semi-empirical calibration method for NORM samples measurement was developed based on a combination of experimental gamma spectrometry measurements and MCNPX simulations. The aim of this work is to provide us with full energy peak efficiency calibration curves in a wide photon energy range which is of particular importance when selected photon energies of  $^{234}\text{Th}$ ,  $^{214}\text{Pb}$ ,  $^{214}\text{Bi}$ ,  $^{228}\text{Ac}$ ,  $^{208}\text{Tl}$  and  $^{226}\text{Ra}$  are to be measured with accuracy.

A Canberra scintillation detector LaBr<sub>3</sub>(Ce) (Model LABR-1.5x1.5) and four reference multi-nuclide volume sources made of epoxy material of different densities were used. Experimental efficiency calculations were performed with the volume sources adapted on an acetal holder which was positioned in a vertical direction along the detector axis of symmetry. MCNPX simulations were performed in order to evaluate the full energy peak efficiency calibration for this source-detector configuration. The models were validated by using the experimental results. Then, nominal samples were analyzed for evaluation of the laboratory technique.

The accurate NORM samples analyses will be helpful for validating the in-situ techniques which will be developed for large volume sources radiological characterization.

### References

- [1] G. F. Knoll, John Wiley and Sons (1999)
- [2] F. Quarati *et al.*, Nucl. Instr. Meth. Phys. Res. A **574**, 1 (2007)
- [3] K. Ciupak *et al.*, Radioanal. Nucl. Chem. **299**, 2 (2014)
- [4] W. F. Mueller *et al.*, ANIMMA 2013



## Differential cross-section measurements of the $^{31}\text{P}(\text{p},\text{p}'\gamma)^{31}\text{P}$ reaction for target characterization using the PIGE technique

K. Preketes-Sigalas<sup>1,2</sup>, A. Lagoyannis<sup>1</sup>, M. Axiotis<sup>1</sup>, M. Kokkoris<sup>2</sup>,  
S. Harissopoulos<sup>1</sup>, E. Ntemou<sup>1,2</sup>, N. Bligoura<sup>2</sup>

<sup>1</sup> *Tandem Accelerator Laboratory, Institute of Nuclear and Particle Physics, NCSR "Demokritos", 15341 Agia Paraskevi, Athens, Greece*

<sup>2</sup> *Department of Physics, National Technical University of Athens, Zografou Campus 15780, Athens, Greece*

Phosphorus (natural abundance: 100%  $^{31}\text{P}$ ) is a highly reactive light element which is met in natural heritage and in many geological, environmental, medical and technological applications. Many phosphate compounds are commonly used for fertilizers and pesticides, but also for detergents. Moreover, phosphorus is used as a dopant for n-type semiconductors, and it is important in archeology, where the precise bulk quantification with the minimum possible sample damage is desired. Among the most common least destructive techniques used for quick and accurate bulk analysis (if the determination of depth profile concentrations is not required) are the Ion Beam Analysis (IBA) ones, namely Particle Induced X-ray Emission (PIXE) and Particle Induced Gamma-ray Emission (PIGE). In the case of matrices where phosphorus coexists with other light elements (e.g. F, B, Al etc.), PIGE can provide more detailed information allowing for the simultaneous determination of several main light isotopes. However, there is a lack of differential cross-section datasets for the  $^{31}\text{P}(\text{p},\text{p}'\gamma)^{31}\text{P}$  reaction in literature, with just two measurements [1, 2] at 90° available in the Ion Beam Analysis Nuclear Data Library (IBANDL, <https://www-nds.iaea.org/exfor/ibandl.htm>). These datasets have an overlap at a limited energy range where the discrepancies are negligible; nevertheless, it is crucial for the applications, but also for theoretical calculations, to have differential cross sections for multiple angles and higher energies. Therefore, an experiment was conducted at the 5.5 MV HV Tandem Accelerator Laboratory of the Institute of Nuclear and Particle Physics (INPP) of the National Center for Scientific Research "Demokritos" (NCSR – "D") in Athens, Greece, using proton beam energies  $E_{\text{p}} \sim 2.6 – 4$  MeV and four (4) HPGe detectors placed at 0°, 55°, 90° and 165° with respect to the beam direction. The obtained results will be presented.

### References

- [1] C. Boni et al., Nucl. Instr. & Meth. B 35 (1988) 80
- [2] A. Jokar et al., Nucl. Instr. and Meth. B 383 (2016) 152



## Angular Elastic Neutron Distribution Of $^{122}\text{Te}$ and $^{11}\text{B}$

İsmail Hakkı SARPÜN<sup>1,2</sup>, Kemal TAŞDÖVEN<sup>1</sup>, Abdullah AYDIN<sup>3</sup>, Eyyup TEL

<sup>1</sup>Akdeniz University, Physics Department, Antalya, Turkey

<sup>2</sup>Akdeniz University, Nuclear Sciences Res. and App. Center, Antalya, Turkey.

<sup>3</sup>Kirikkale University, Physics Dept., Kirikkale, Turkey

<sup>3</sup>Osmaniye Korkut Ata University, Physics Dept., Osmaniye, Turkey

In fission and fusion reactor designs, it is important to calculate cross-section for nuclear reactions which are induced by neutron. Angular distribution of  $^{122}\text{Te}$  and  $^{11}\text{B}$  have been theoretically calculated at different incident energy using TALYS 1.8 nuclear reaction code. Evaluated theoretical results are compared with available experimental data in EXFOR International Nuclear Data Library. Results show that, theoretically evaluated and experimental values are in good agreement.



## Proton-Induced Spallation Reactions on Fe targets

Z. Tsagkala<sup>1</sup>, N.G. Nicolis<sup>1</sup> and G.A. Souliotis<sup>2</sup>

<sup>1</sup> Department of Physics, University of Ioannina, Ioannina, Greece

<sup>2</sup> Laboratory of Physical Chemistry, Department of Chemistry, University of Athens, Athens, Greece

Presenting author email: tsagzoi@gmail.com

Measured excitation functions of 16 reaction products in  ${}^A\text{Fe}(\text{p},\text{x})$  reactions are compared with model calculations in a wide energy range. Reaction products of interest involve  ${}^{36}\text{Cl}$ ,  ${}^{38}\text{Ar}$ ,  ${}^{42,43}\text{K}$ ,  ${}^{44}\text{Ti}$ ,  ${}^{46,47,48}\text{Sc}$ ,  ${}^{48,51}\text{Cr}$ ,  ${}^{52,54}\text{Mn}$  and  ${}^{55,56,57}\text{Co}$ . Experimental data were obtained from an International Nuclear Data Committee (INDC) compilation on proton induced reactions on  ${}^{56}\text{Fe}$  from threshold to 2.6 GeV [1] and recent measurements of excitation functions of proton-induced reactions on  ${}^{\text{nat}}\text{Fe}$  in the energy region from threshold up to 45 MeV [2].

At energies less than 200 MeV, excitation functions calculated with the code TALYS [3] are in good agreement with the experimental data, apart from some discrepancies for the Sc, Ti and K isotopes. Isotopic distributions are also calculated in the framework of the intranuclear cascade code ISABEL [4,5] coupled with the sequential binary decay code MECO [6]. A good agreement is found with the majority of the experimental data in the energy range from 50 to 1500 MeV.

### References

- [1] R. Michel and N. Otuka, Database for Proton Induced Residual Production Cross Sections up to 2.6 GeV, Available from: <<http://www-nds.iaea.org/publications/>>.
- [2] Kwangsoo Kim, Mayeen Uddin Khandaker, Haladhara Naik and Guinyun Kim, *Nucl. Inst. Meth. Phys. Res. B* 322 (2014) 63-69.
- [3] A.J. Koning, S. Hilaire, M.C. Duijvestijn, TALYS-1.0, in: *Proceedings of the International Conference On Nuclear Data for Science and Technology*, Nice, France, April 22–27 (2007), O. Bersillon, F. Gunsing, E. Bauge, R. Jaqmin, S. Leray, (Eds.), EDP Science (2008) pp. 211–214, Available from: <<http://www.talys.eu/download-talys/>>.
- [4] Y. Yariv and Z. Fraenkel, *Phys. Rev.* C20, 2227 (1979).
- [5] Y. Yariv and Z. Fraenkel, *Phys. Rev.* C24, 488 (1981).
- [6] N.G. Nicolis, *Int. J. Mod. Phys.* E17, 1541-1556 (2008).




## Determination of Natural Radionuclides in the Region of Oil Shale-Fired Power Plants in Northwest Greece

P. Tsamos, F.Noli

*Department of Chemistry, Aristotle University of Thessaloniki, GR-54124 Thessaloniki*

Large amounts of NORM ((Naturally Occurring Radioactive Material) are produced every year from the oil shale-fired power plants. The activity concentrations of the natural radionuclides, present elevated values on the ground and in the atmosphere in areas near the plants and therefore it is worth to evaluate their dispersion and to assess the radiological status.

Using gamma spectrometry with a HP-germanium detector in a low background configuration, activity concentrations for the  $^{238}\text{U}$ ,  $^{232}\text{Th}$  and  $^{40}\text{K}$  in soil and water samples around the oil shale-fired power plants in northwest Greece were measured. Furthermore alpha-ray spectrometry with appropriate radiochemical separations was applied for the determination of the uranium isotopes ( $^{238}\text{U}$  and  $^{234}\text{U}$ ). The resulting determined enrichment (EFs) and contamination factors (CFs) also provide an estimation of the radiation hazard and the pollution in these regions.



## Macroscopic X-ray fluorescence characterization of Platinum Group Mineral inclusions in archeological gold

Kalliopi Tsampa<sup>1</sup>, Vasiliki Kantarelou<sup>1</sup>, Claudia Caliri<sup>2</sup>, Francesco Paolo Romano<sup>2,3</sup>, Sharon R. Stocker<sup>4</sup>, Andreas Germanos Karydas<sup>1</sup>

<sup>1</sup> *Institute of Nuclear and Particle Physics, N.C.S.R. "Demokritos", Patriarchou Grigoriou and Neapoleos 27, Agia Paraskevi, 15341, Athens, Greece*

<sup>2</sup> *Laboratori Nazionali del Sud, INFN, Via Santa Sofia 62, 95123, Catania, Italy*

<sup>3</sup> *CNR, Istituto per i Beni Archeologici e Monumentali (IBAM), Via Biblioteca 4, 95124, Catania, Italy*

<sup>4</sup> *University of Cincinnati, Department of Classics, Blegen Library 410, P.O. Box 210226, Cincinnati Ohio 45221-0226*

In May 2015, a team from the University of Cincinnati discovered an unlooted Mycenaean grave near the Palace of Nestor in Pylos Messenia. Among the excavated goods, four gold signet rings were found, decorated with Minoan rituals [1, 2]. The holistic macro-XRF (MA-XRF) imaging analysis of the external surface of the rings using the state of art LANDIS-X mobile x-ray scanner [3], offered the unique possibility of identifying several platinum group mineral inclusions (PGMs) containing elements such as osmium, iridium and ruthenium. The presence of PGM inclusions in ancient gold objects is considered a clear indication that the gold and the PGM inclusions became associated as a result of fluvial transport [4].

The aim of the present work is the detailed characterization of the PGM inclusions in terms of their morphological and compositional profile. Since it is first time that PGM inclusions are detected in Mycenaean gold, it is expected that the results of the present work will provide a sound basis for comparison of Mycenaean gold with other Bronze Age gold artefacts found in Egypt and elsewhere, shedding a first light to the mystery of the wealth acquisition of the Mycenaean reign.

### References

- [1] [www.griffinwarrior.org](http://www.griffinwarrior.org)
- [2] Davis JL and Stocker SR, The Lord of the Gold Rings - The Griffin Warrior of Pylos, *Hesperia* 2016;85:627-655
- [3] Romano F.P., Caliri C., Nicotra P., Di Martino S., Pappalardo L., Rizzo F., Santos H., Real-time elemental imaging of large dimension paintings with a novel mobile macro X-ray fluorescence (MA-XRF) scanning technique *Journal of Analytical Atomic Spectrometry*, 2017;32(4):773-781
- [4] Meeks N.D. and Tite M.S., The Analysis of Platinum-group Element Inclusions in Gold Antiquities, *Journal of Archaeological Science* 1980, 7, 267-275

## TL Dose response of Beryllium Oxide (BeO) radiation dosimeter at elevated temperatures

E. Tsoutsoumanos, P. Konstantinidis, G. Kitis

*Nuclear Physics Laboratory, Aristotle University of Thessaloniki, 54124, Greece.*

Beryllium oxide is a radiation detector and a dosimetric material that is widely studied due to its interesting characteristics, as well as its commercial availability and low cost. It presents strong thermoluminescence (TL) intensity, high sensitivity in ionizing radiation, as well as tissue-equivalent properties ( $Z_{\text{Eff}} \approx 7.14$ ), making it an ideal luminescence dosimeter. An important characteristic of thermoluminescent dosimeters (TLD) is the TL dose response, which determines the dose range of usability of the dosimeter subject to dose response linearity. Also, determines the precision of dose measurement as a function of dose.

In the present study, the dose response linearity of the glow peaks in BeO:Li<sup>+</sup>,Al<sup>+</sup> has been demonstrated, for three different irradiation temperatures of 25°C, 125°C and 220°C. The kinetic parameters of the traps were determined, using Computerized Curve Deconvolution (CCD) method.

Fig. 1 shows examples of glow curves obtained for the same dose at the three irradiation temperatures (25°C, 125°C, 220°C). Fig. 2 shows the TL dose response of both peaks at room temperature.

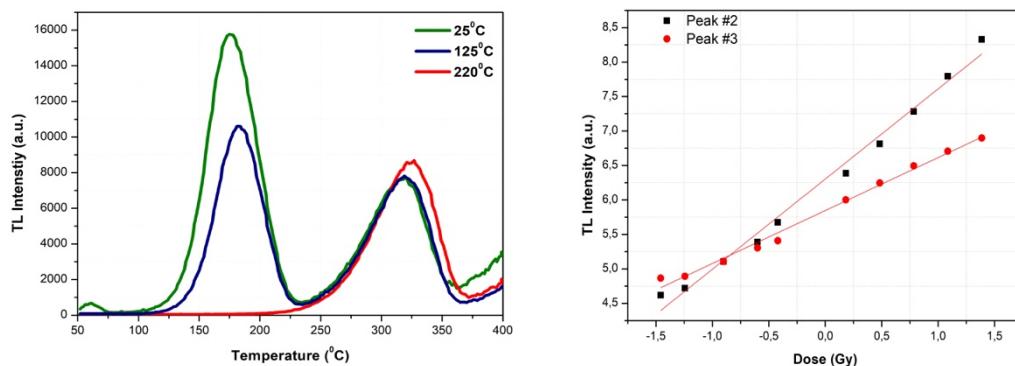


Figure 1: (Left): BeO TLD dose response curves which were obtained in three different irradiation temperatures (25°C, 125°C, 220°C) for a dose of 0.38 Gy.

Figure 2: (Right): BeO TLD dose response of the second (#2) and third (#3) peak at 25°C following <sup>90</sup>Sr/<sup>90</sup>Y irradiation.

### References

- [1] V. Pagonis, G. Kitis and C. Furetta, Numerical and Practical Exercises in Thermoluminescence, Springer Science+Business Media, Inc. (2006)
- [2] C. Furetta and P. Weng, Operation Thermoluminescence Dosimetry, World Scientific Co. Pte. Ltd. (1998)